





- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Swivel dish feature compensates for sloped floors, evenly loading isolator
- Patented Glide-Ring® feature dissipates horizontal forces to prevent walking
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

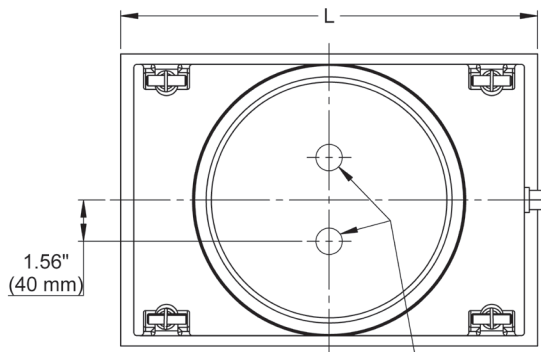


Optional "AT" Anchor Through
For anchoring isolator to foundation.
Anchor size up to 1.00" (25 mm).
Location varies with each order.

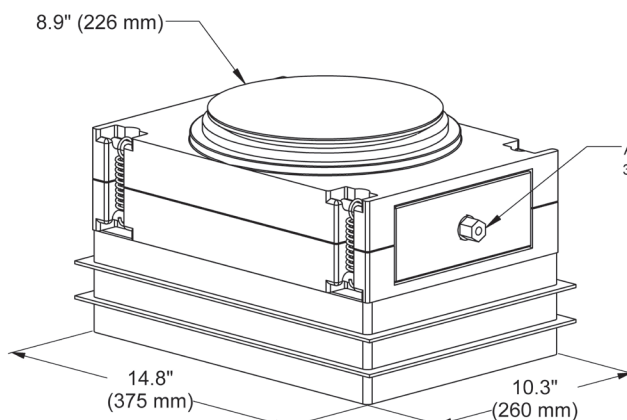

Hold-down bolt with
locknut and washer

Isolator is furnished with either
a friction top pad or an on-center
3/4\" to 1.25\" hold-down bolt.
Off center hold-down bolt
configurations available as
special order.

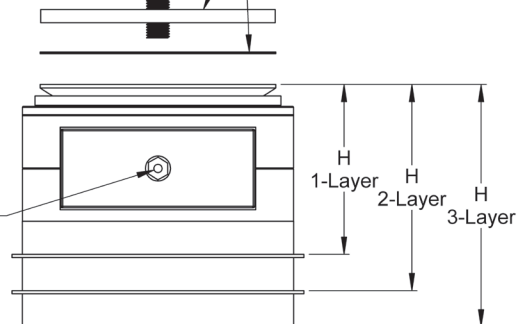


On-Center Hold-Down Bolt Version

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
16W	1 Layer	16WM47	14.8	376	10.2	259	7.4	188	8.4	213	7.9	201	169	77
		16WL62	14.8	376	10.2	259	7.0	178	8.0	203	7.5	191	166	75
		16WK72	14.8	376	10.2	259	6.8	173	7.8	198	7.3	185	165	75
		16WX80	14.8	376	10.2	259	6.5	165	7.5	191	7.0	178	162	74
16W	2 Layer	16WM472	14.8	376	10.2	259	9.3	236	10.3	262	9.8	249	195	88
		16WL622	14.8	376	10.2	259	8.5	216	9.5	241	9.0	229	190	86
		16WK722	14.8	376	10.2	259	8.1	206	9.1	231	8.6	218	187	85
		16WX802	14.8	376	10.2	259	7.5	191	8.5	216	8.0	203	181	82
16W	3 Layer	16WM473	14.8	376	10.2	259	11.2	284	12.2	310	11.7	297	221	100
		16WL623	14.8	376	10.2	259	10.0	254	11.0	279	10.5	267	214	97
		16WK723	14.8	376	10.2	259	9.4	239	10.4	264	9.9	251	209	95
		16WX803	14.8	376	10.2	259	8.5	216	9.5	241	9.0	229	201	91

Friction Pad or Off-Center Bolt Version

Isolator			L		W		H ±1/8" (3mm)						Weight	
							Minimum		Maximum		Installed			
Series		Model	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
16W	1 Layer	16WM47	14.8	376	10.2	259	7.0	178	8.0	203	7.5	191	160	73
		16WL62	14.8	376	10.2	259	6.6	168	7.6	193	7.1	180	157	71
		16WK72	14.8	376	10.2	259	6.4	163	7.4	188	6.9	175	156	71
		16WX80	14.8	376	10.2	259	6.1	155	7.1	180	6.6	168	153	69
16W	2 Layer	16WM472	14.8	376	10.2	259	8.9	226	9.9	251	9.4	239	186	84
		16WL622	14.8	376	10.2	259	8.1	206	9.1	231	8.6	218	181	82
		16WK722	14.8	376	10.2	259	7.7	196	8.7	221	8.2	208	178	81
		16WX802	14.8	376	10.2	259	7.1	180	8.1	206	7.6	193	173	78
16W	3 Layer	16WM473	14.8	376	10.2	259	10.8	274	11.8	300	11.3	287	212	96
		16WL623	14.8	376	10.2	259	9.6	244	10.6	269	10.1	257	205	93
		16WK723	14.8	376	10.2	259	9.0	229	10.0	254	9.5	241	200	91
		16WX803	14.8	376	10.2	259	8.1	206	9.1	231	8.6	218	192	87

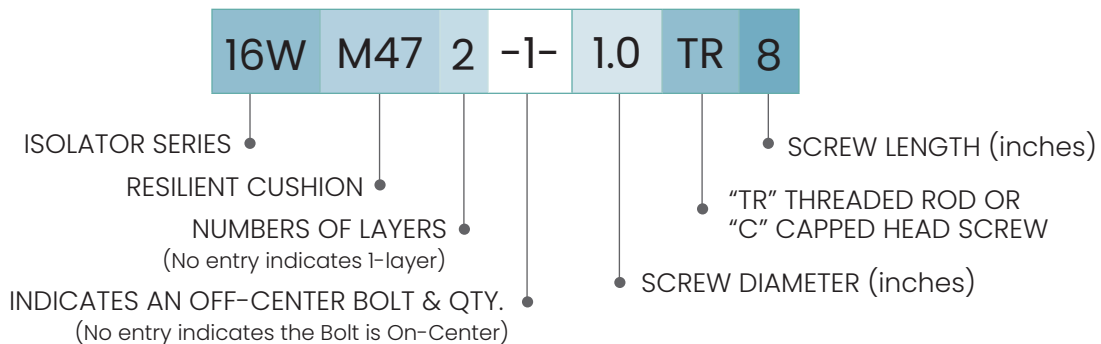

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

07/01/2026



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com