



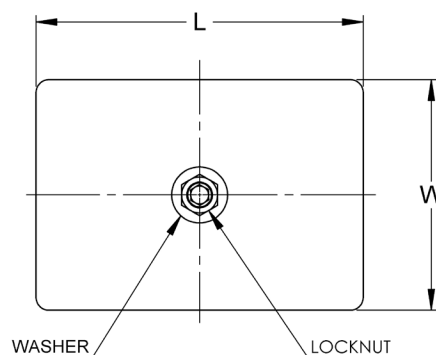


- Elastomer vibration & shock mount
 - protects environment against transmitted vibration & shock
 - protects sensitive equipment from incoming vibration & shock
 - faster, easier installations compared to grouting & anchoring
- Vertical leveling screw
 - secures mount to machine foot
 - provides precision leveling
 - compensates for sloping floor
- Proper machine support
- Proprietary elastomer cushions
 - oil and chemical resistant
 - multiple hardness & thickness for better isolation effectiveness
 - neoprene, nitrile standard compounds
- Meets OSHA anchoring requirements

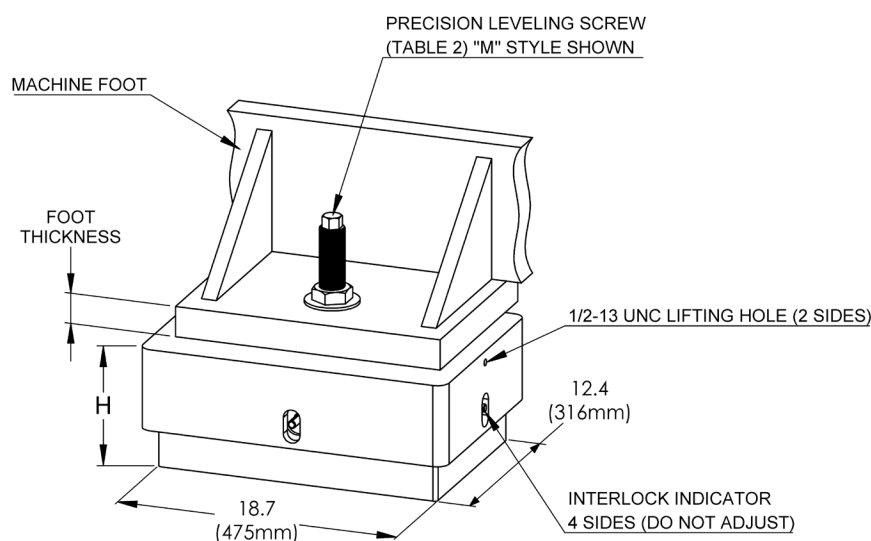

TYPICAL APPLICATIONS

- | | | | |
|---------------------------|----------------|---------------------|---------------------|
| • Presses, Mechanical | • Press brakes | • Swagers | • Cold Headers |
| • Forging Presses | • Shears | • Broaching | • Vertical Lathes |
| • Metal Container Presses | • Grinders | • Die Casters | • Machining Centers |
| • Turret Punch Presses | • Mills | • Injection Molders | • Generators |

Isolator		L		W		H ±1/8" (3mm)						Weight		Leveling Screw	Foot Thickness Up To:				Weight	
Series	Model					Minimum		Maximum		Installed					20 Series		25-26 series			
		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg		inch	mm	inch	mm	lbs	Kg
20	BFM1230/34	20.5	521	14.5	368	7.00	177.8	8.00	203.2	7.50	190.5	337	153	1.5M7	1.8	46			4.4	2.0
	BFM1230/44	20.5	521	14.5	368	7.00	177.8	8.00	203.2	7.50	190.5	337	153	1.5M8	2.8	71			4.8	2.2
	BFM1230/54	20.5	521	14.5	368	7.00	177.8	8.00	203.2	7.50	190.5	337	153	1.5M10	4.8	122			5.8	2.6
	BFM1150/52	20.5	521	14.5	368	6.38	162.1	7.38	187.5	6.88	174.8	331	150	1.75M8	2.7	69			6.7	3.0
	BFM1150/57	20.5	521	14.5	368	6.38	162.1	7.38	187.5	6.88	174.8	331	150	1.75M10	4.7	119			8.0	3.6
	BFM1150/62	20.5	521	14.5	368	6.38	162.1	7.38	187.5	6.88	174.8	331	150	1.75M12	6.7	170			9.3	4.2
	BFM1340/60	20.5	521	14.5	368	6.00	152.4	7.00	177.8	6.50	165.1	326	148	2M8	2.6	66			9.1	4.1
	BFM1340/70	20.5	521	14.5	368	6.00	152.4	7.00	177.8	6.50	165.1	326	148	2M10	4.6	117			10.7	4.9
25	BFM2560	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	757	343	2M12	6.6	168			12.4	5.6
	BFM2576	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	757	343	2M14	8.5	216			14.1	6.4
	BFM2590	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	757	343	2.25M7	1.4	36	0.9	23	10.9	4.9
	BFM25100	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	744	338	2.25M8	2.4	61	1.9	48	11.9	5.4
	BFM25110	26.5	673	19.5	495	7.90	200.7	8.90	226.1	8.40	213.4	744	338	2.25M10	4.4	112	3.9	99	13.3	6.0
	BFM25135	26.5	673	19.5	495	7.90	200.7	8.90	226.1	8.40	213.4	744	338	2.25M12	6.4	163	5.9	150	16.7	7.6
26	BFM2660	26.5	673	19.5	495	8.90	226.1	9.90	251.5	9.40	238.8	749	340	2.25M14	8.5	216	7.9	201	20.1	9.1
	BFM2676	26.5	673	19.5	495	8.90	226.1	9.90	251.5	9.40	238.8	805	365	2.5M8	2.4	61	1.7	43	14.6	6.6
	BFM2690	26.5	673	19.5	495	8.90	226.1	9.90	251.5	9.40	238.8	805	365	2.5M10	4.2	107	3.7	94	17.0	7.7
	BFM26100	26.5	673	19.5	495	8.90	226.1	9.90	251.5	9.40	238.8	808	367	2.5M12	6.2	157	5.7	145	20.0	9.1
	BFM26110	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	802	364	2.5M14	8.2	208	7.7	196	23.0	10.4
	BFM26135	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	802	364	2.75M10	4.0	102	3.4	86	22.0	10.0
	BFM26180	26.5	673	19.5	495	8.40	213.4	9.40	238.8	8.90	226.1	806	366	2.75M12	6.0	152	5.4	137	25.0	11.3
														3M10			3.3	84	22.0	10.0
														3M12			5.3	135	25.0	11.3
Other Stock & Custom Lengths Available																				

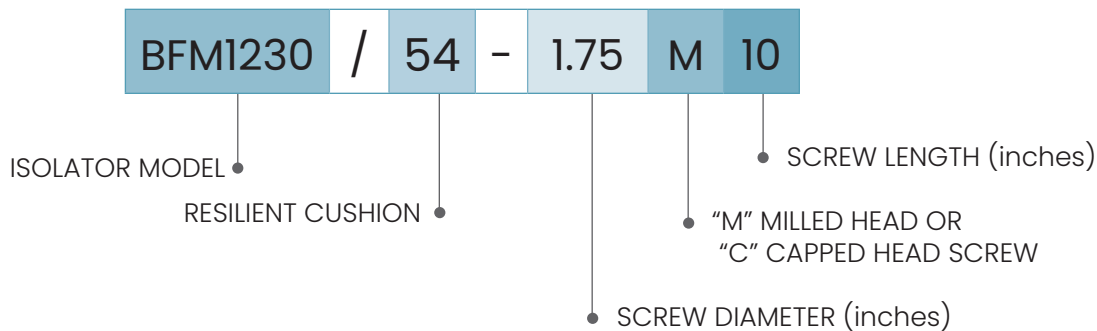

NOTE: Isolator data subject to change without notice.

10/10/2023



Socitec US LLC
2243 Braga Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibrodynamics.com
www.vibro-dynamics.com