




Two Leveling Screw Isolators are recommended for machine with two mounting holes in each foot

- Elastomer vibration & shock mount
 - protects environment against transmitted vibration & shock
 - protects sensitive equipment from incoming vibration & shock
 - faster, easier installations compared to grouting & anchoring
- Vertical leveling screw
 - secures mount to machine foot
 - provides precision leveling
 - compensates for sloping floor
- Proper machine support
- Proprietary elastomer cushions
 - oil and chemical resistant
 - multiple hardness & thickness for better isolation effectiveness
 - neoprene, nitrile standard compounds
- Meets OSHA anchoring requirements

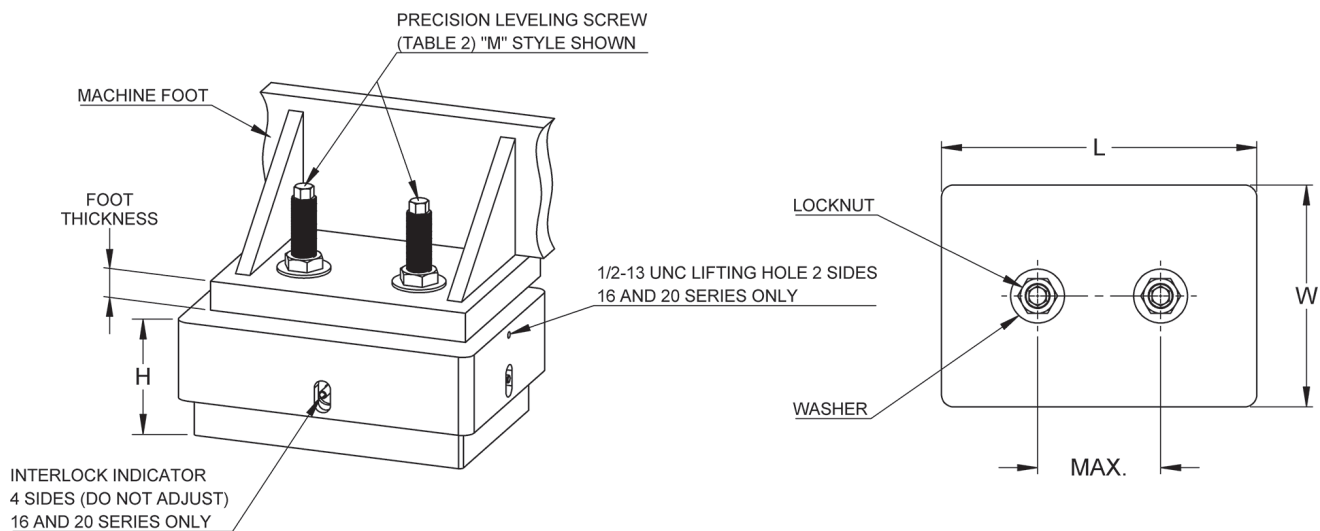


Notes:

1. Leveling Screw Diameter & Length depend on the mounting hole diameter & foot thickness.
2. 216 thru 220 Series are furnished with Interlocks.
3. 210 thru 216 Series dimension H is unloaded.
4. Height tolerances are $\pm 1/16"$ for Series 210-216 and $\pm 1/8"$ for Series 220.

TYPICAL APPLICATIONS

- | | | | |
|---------------------------|----------------|---------------------|---------------------|
| • Presses, Mechanical | • Press brakes | • Swagers | • Cold Headers |
| • Forging Presses | • Shears | • Broaching | • Vertical Lathes |
| • Metal Container Presses | • Grinders | • Die Casters | • Machining Centers |
| • Turret Punch Presses | • Mills | • Injection Molders | • Generators |

Isolator		L		W		H ±1/8"(3mm)						Table 2 Leveling Screw Diameter/Maximum Spacing														Weight	
Series	Model					Minimum		Maximum		Installed		0.75		1		1.125		1.25		1.5		1.75		2			
		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg		
210	210M800	12.1	307	10.1	257	4.00	101.6	4.75	120.7	4.38	111.3	9.25	235	9.00	229	8.88	226	8.75	222							53	24.0
	210M1200	12.1	307	10.1	257	4.00	101.6	4.75	120.7	4.38	111.3	9.25	235	9.00	229	8.88	226	8.75	222							53	24.0
	210L200	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	9.25	235	9.00	229	8.88	226	8.75	222							51	23.1
	210L450	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	9.25	235	9.00	229	8.88	226	8.75	222							51	23.1
	210L600	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	9.25	235	9.00	229	8.88	226	8.75	222							51	23.1
	210L900	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	9.25	235	9.00	229	8.88	226	8.75	222							51	23.1
	210LK900	12.1	307	10.1	257	3.63	92.2	4.38	111.3	4.00	101.6	9.25	235	9.00	229	8.88	226	8.75	222							56	25.4
	210K650	12.1	307	10.1	257	3.25	82.6	4.00	101.6	3.63	92.2	9.25	235	9.00	229	8.88	226	8.75	222							54	24.5
	210K950	12.1	307	10.1	257	3.25	82.6	4.00	101.6	3.63	92.2	9.25	235	9.00	229	8.88	226	8.75	222							54	24.5
216	216M1500	16.3	414	13.3	338	5.75	146.1	6.75	171.5	6.25	158.8			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			161	73.0
	216M2100	16.3	414	13.3	338	5.75	146.1	6.75	171.5	6.25	158.8			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			160	72.6
	216M3000	16.3	414	13.3	338	5.75	146.1	6.75	171.5	6.25	158.8			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			161	73.0
	216L700	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			152	69.0
	216L1000	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			154	69.9
	216L1400	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			155	70.3
	216L2000	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			155	70.3
	216K1800	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			162	73.5
	216K2500	16.3	414	13.3	338	5.00	127.0	6.00	152.4	5.50	139.7			12.00	305	11.88	302	11.75	298	11.50	292	11.25	286			162	73.5
220	BFM1417/44	20.5	521	14.5	368	7.00	177.8	8.00	203.2	7.50	190.5							15.50	394	15.25	387	15.00	381	14.75	375	314	142.5
	BFM1417/54	20.5	521	14.5	368	7.00	177.8	8.00	203.2	7.50	190.5							15.50	394	15.25	387	15.00	381	14.75	375	316	143.4
	BFM1235/57	20.5	521	14.5	368	6.38	162.1	7.38	187.5	6.88	174.8							15.50	394	15.25	387	15.00	381	14.75	375	308	139.7
	BFM1235/62	20.5	521	14.5	368	6.38	162.1	7.38	187.5	6.88	174.8							15.50	394	15.25	387	15.00	381	14.75	375	308	139.7
	BFM1415/60	20.5	521	14.5	368	6.00	152.4	7.00	177.8	6.50	165.1							15.50	394	15.25	387	15.00	381	14.75	375	302	137.0
	BFM1415/70	20.5	521	14.5	368	6.00	152.4	7.00	177.8	6.50	165.1							15.50	394	15.25	387	15.00	381	14.75	375	304	137.9

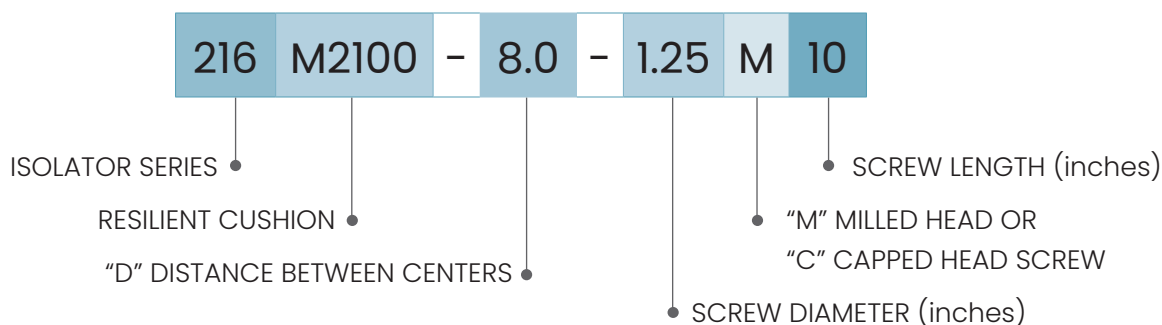

NOTE: Isolator data subject to change without notice.

10/10/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com