



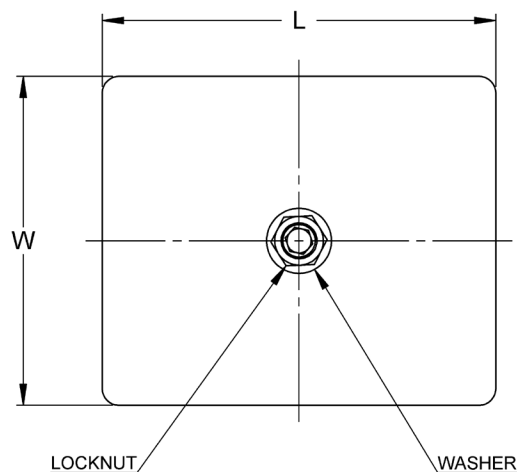

- Elastomer vibration & shock mount
 - protects environment against transmitted vibration & shock
 - protects sensitive equipment from incoming vibration & shock
 - faster, easier installations compared to grouting & anchoring
- Vertical leveling screw
 - secures mount to machine foot
 - provides precision leveling
 - compensates for sloping floor
- Proper machine support
- Proprietary elastomer cushions
 - oil and chemical resistant
 - multiple hardness & thickness for better isolation effectiveness
 - neoprene, nitrile standard compounds
- Meets OSHA anchoring requirements

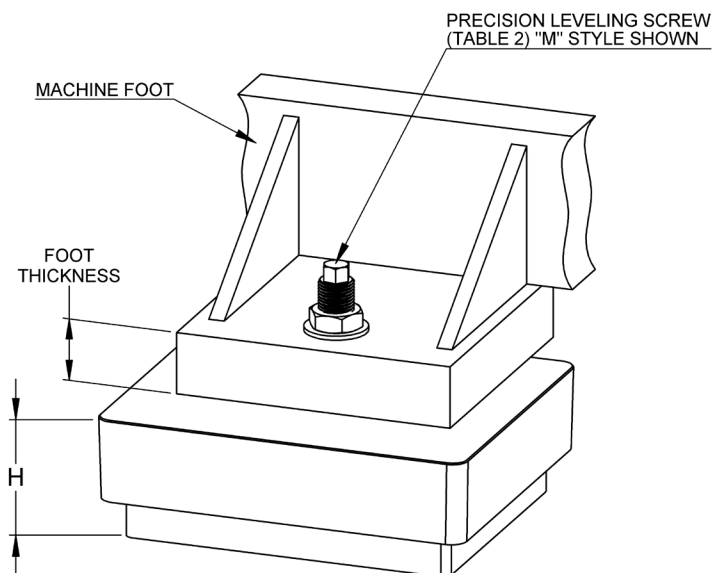


TYPICAL APPLICATIONS

- | | | | |
|---------------------------|----------------|---------------------|---------------------|
| • Presses, Mechanical | • Press brakes | • Swagers | • Cold Headers |
| • Forging Presses | • Shears | • Broaching | • Vertical Lathes |
| • Metal Container Presses | • Grinders | • Die Casters | • Machining Centers |
| • Turret Punch Presses | • Mills | • Injection Molders | • Generators |

Isolator		L		W		H ±1/8" (3mm)						Weight	
Series	Model					Minimum		Maximum		Installed			
		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
9	9L180	10.3	262	8.3	211	3.13	79.5	3.88	98.6	3.51	89.2	31	14.1
	9L250	10.3	262	8.3	211	3.13	79.5	3.88	98.6	3.51	89.2	31	14.1
	9L350	10.3	262	8.3	211	3.13	79.5	3.88	98.6	3.51	89.2	31	14.1
	9K225	10.3	262	8.3	211	2.75	69.9	3.50	88.9	3.13	79.5	32	14.5
	9K275	10.3	262	8.3	211	2.75	69.9	3.50	88.9	3.13	79.5	32	14.5
	9K375	10.3	262	8.3	211	2.75	69.9	3.50	88.9	3.13	79.5	32	14.5
	9M780	10.3	262	8.3	211	3.75	95.3	4.50	114.3	4.13	104.9	32	14.5
	9M880	10.3	262	8.3	211	3.75	95.3	4.50	114.3	4.13	104.9	32	14.5
10	10M800	12.1	307	10.1	257	4.00	101.6	4.75	120.7	4.38	111.3	53	24.0
	10M1200	12.1	307	10.1	257	4.00	101.6	4.75	120.7	4.38	111.3	53	24.0
	10L200	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	53	24.0
	10L450	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	53	24.0
	10L600	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	53	24.0
	10L900	12.1	307	10.1	257	3.38	85.9	4.13	104.9	3.75	95.3	53	24.0
	10LK900	12.1	307	10.1	257	3.63	92.2	4.38	111.3	4.00	101.6	56	25.4
	10K650	12.1	307	10.1	257	3.25	82.6	4.00	101.6	3.63	92.2	58	26.3
	10K950	12.1	307	10.1	257	3.25	82.6	4.00	101.6	3.63	92.2	58	26.3

Leveling Screw	Foot Thickness Up To:				Weight	
	9 series		10 series			
	inch	mm	inch	mm	lbs	Kg
.625M4	1.0	25			0.4	0.18
.625M5	2.0	51			0.4	0.18
.625M6	3.0	76			0.5	0.23
.625M8	5.0	127			0.7	0.32
.75M4	1.1	28	0.9	23	0.5	0.23
.75M5	2.1	53	1.9	48	0.9	0.41
.75M6	3.1	79	2.9	74	1.1	0.50
.75M8	5.1	130	4.9	124	1.5	0.68
.75M10	7.1	180	6.9	175	1.8	0.82
1M4	1.0	25	0.8	20	1.2	0.54
1M5	2.0	51	1.8	46	1.3	0.59
1M6	3.0	76	2.8	71	1.5	0.68
1M8	5.0	127	4.8	122	1.9	0.86
1.125M	2.9	74	2.7	69	1.9	0.86
1.125M	4.9	124	4.7	119	2.4	1.09
1.125M	6.9	175	6.7	170	2.9	1.32
1.25M			2.6	66	2.5	1.13
1.25M			4.6	117	3.1	1.41
1.25M			6.6	168	3.7	1.68
1.5M			3.4	86	4.4	2.00
1.5M			4.4	112	4.8	2.18
1.5M			6.4	163	5.8	2.63
1.5M			8.4	213	6.7	3.04
Other Stock & Custom Lengths Available						

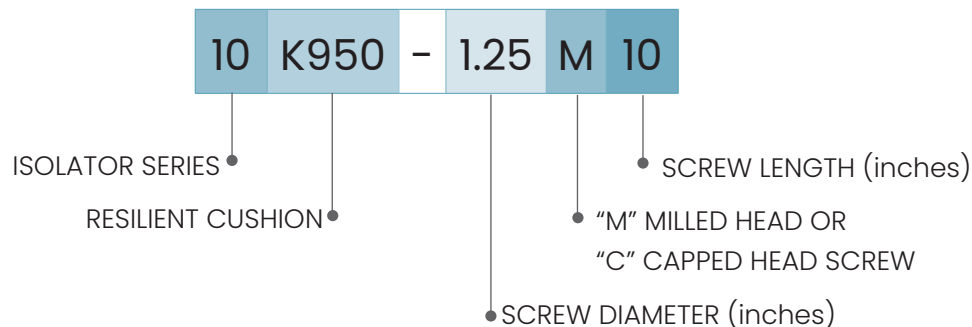

NOTE: Isolator data subject to change without notice.

10/10/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com