


MICRO/LEVEL ISOLATORS: 9H & 10H SERIES



H-Style Isolators are recommended when less horizontal motion is desired.

- Elastomer vibration & shock mount
 - protects environment against transmitted vibration & shock
 - protects sensitive equipment from incoming vibration & shock
 - faster, easier installations compared to grouting & anchoring
- Vertical leveling screw
 - secures mount to machine foot
 - provides precision leveling
 - compensates for sloping floor
- Proper machine support
- Proprietary elastomer cushions
 - oil and chemical resistant
 - multiple hardness & thickness for better isolation effectiveness
 - neoprene, nitrile standard compounds
- Meets OSHA anchoring requirements

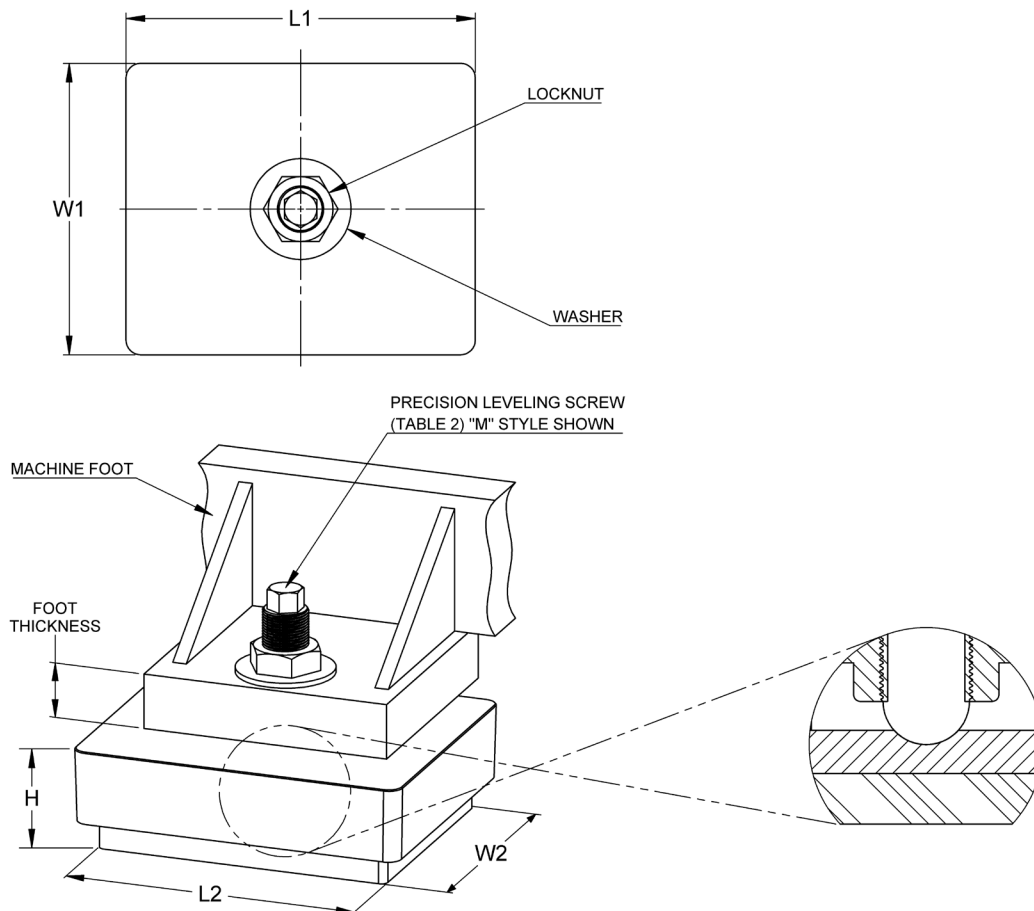


TYPICAL APPLICATIONS

- | | | | |
|---------------------------|----------------|---------------------|---------------------|
| • Presses, Mechanical | • Press brakes | • Swagers | • Cold Headers |
| • Forging Presses | • Shears | • Broaching | • Vertical Lathes |
| • Metal Container Presses | • Grinders | • Die Casters | • Machining Centers |
| • Turret Punch Presses | • Mills | • Injection Molders | • Generators |

Isolator		L1	W1	L2	W2	H ±1/8"			Weight (lbs)
Series	Model					Min	Max	Installed	
9H	9M580H	10.3	8.3	9.3	7.3	3.75	4.50	4.13	32
	9M680H	10.3	8.3	9.3	7.3	3.75	4.50	4.13	32
	9M780H	10.3	8.3	9.3	7.3	3.75	4.50	4.13	32
	9M880H	10.3	8.3	9.3	7.3	3.75	4.50	4.13	32
	9L180H	10.3	8.3	9.3	7.3	3.13	3.88	3.51	32
	9L250H	10.3	8.3	9.3	7.3	3.13	3.88	3.51	32
	9L350H	10.3	8.3	9.3	7.3	3.13	3.88	3.51	32
	9K225H	10.3	8.3	9.3	7.3	2.75	3.50	3.13	32
	9K275H	10.3	8.3	9.3	7.3	2.75	3.50	3.13	32
	9K375H	10.3	8.3	9.3	7.3	2.75	3.50	3.13	32
	9K500H	10.3	8.3	9.3	7.3	2.75	3.50	3.13	32
10H	10M800H	12.1	10.1	10.7	8.7	4.00	4.75	4.38	57
	10M1200H	12.1	10.1	10.7	8.7	4.00	4.75	4.38	57
	10KM1200H	12.1	10.1	10.7	8.7	4.25	5.00	4.50	57
	10L200H	12.1	10.1	10.7	8.7	3.38	4.13	3.75	57
	10L450H	12.1	10.1	10.7	8.7	3.38	4.13	3.75	57
	10L600H	12.1	10.1	10.7	8.7	3.38	4.13	3.75	57
	10L900H	12.1	10.1	10.7	8.7	3.38	4.13	3.75	57
	10LK900H	12.1	10.1	10.7	8.7	3.63	4.38	4.00	57
	10K650H	12.1	10.1	10.7	8.7	3.25	4.00	3.63	57
	10K950H	12.1	10.1	10.7	8.7	3.25	4.00	3.63	57

Leveling Screw	Foot Thickness Up To:	Weight (lbs.)
1H6	2.3	1.5
1.25H6	4.1	3.1
1.25H12	8.7	4.3
<i>Custom Lengths are Available</i>		

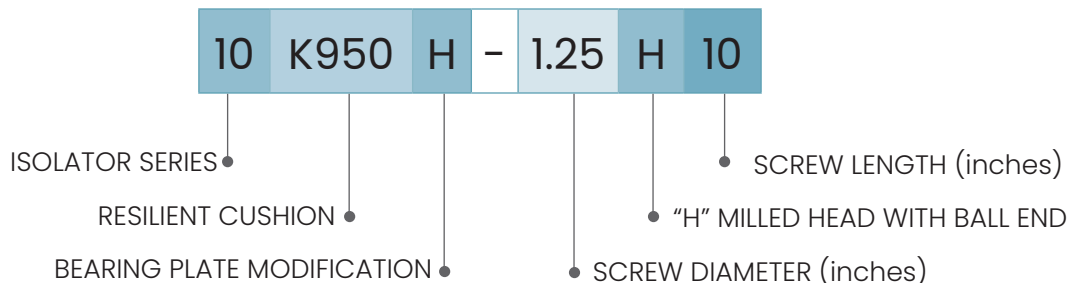

NOTE: Isolator data subject to change without notice.

09/11/2019