




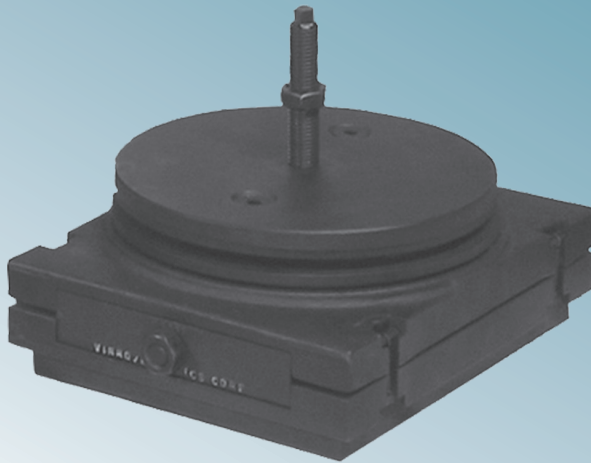

- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Swivel dish feature compensates for sloped floors, evenly loading isolator
- Patented Glide-Ring® feature dissipates horizontal forces to prevent walking
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

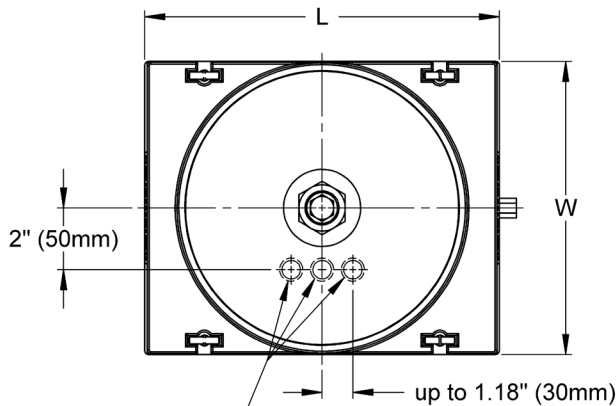


Optional "AT" Anchor Through
For anchoring isolator to foundation.
Anchor size up to 0.75" (20mm).
Location varies with each order.

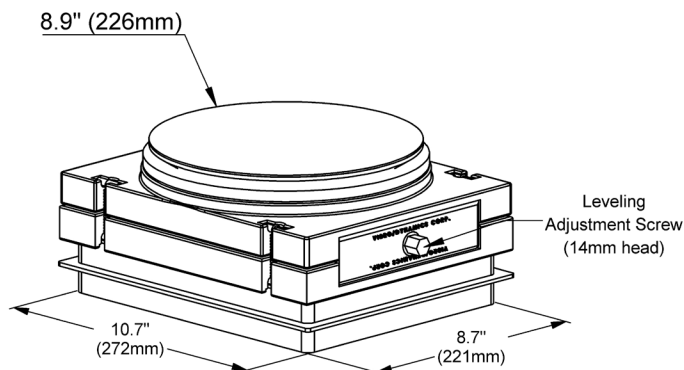

Hold-Down Bolt with
Lock nut and Washer.

Hold-down
Mounting Plate
(Shown Unassembled)

Isolator is furnished with either
a friction top pad or an on-center
3/4" or 1" hold-down bolt.
Off center hold-down bolt
configurations available as
special order.

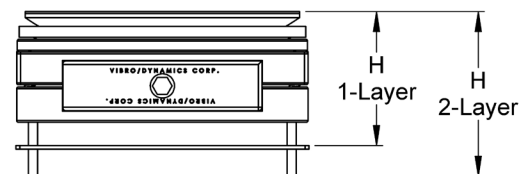


On-Center Hold-Down Bolt Version

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
12W	1 Layer	12WM880	11.3	287	9.5	241	5.3	135	6.2	157	5.8	147	81	37
		12WM1100	11.3	287	9.5	241	5.3	135	6.2	157	5.8	147	81	37
		12WL1500	11.3	287	9.5	241	4.7	119	5.6	142	5.2	132	78	35
		12WK2200	11.3	287	9.5	241	4.3	109	5.2	132	4.8	122	77	35
12W	2 Layer	12WM8802	11.3	287	9.5	241	6.9	175	7.8	198	7.4	188	91	41
		12WM11002	11.3	287	9.5	241	6.9	175	7.8	198	7.4	188	90	41
		12WL15002	11.3	287	9.5	241	5.7	145	6.6	168	6.2	157	86	39
		12WK22002	11.3	287	9.5	241	4.9	124	5.8	147	5.4	137	83	38

Friction Pad or Off-Center Bolt Version

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
12W	1 Layer	12WM880	11.3	287	9.5	241	4.8	122	5.7	145	5.3	135	72	33
		12WM1100	11.3	287	9.5	241	4.8	122	5.7	145	5.3	135	72	33
		12WL1500	11.3	287	9.5	241	4.2	107	5.1	130	4.7	119	69	31
		12WK2200	11.3	287	9.5	241	3.8	97	4.7	119	4.3	109	68	31
12W	2 Layer	12WM8802	11.3	287	9.5	241	6.4	163	7.3	185	6.9	175	82	37
		12WM11002	11.3	287	9.5	241	6.4	163	7.3	185	6.9	175	81	37
		12WL15002	11.3	287	9.5	241	5.2	132	6.1	155	5.7	145	77	35
		12WK22002	11.3	287	9.5	241	4.4	112	5.3	135	4.9	124	74	34

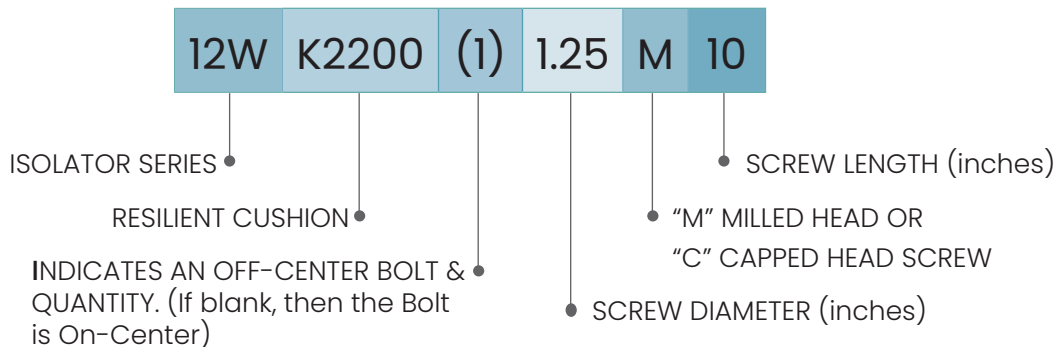

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

10/05/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com