


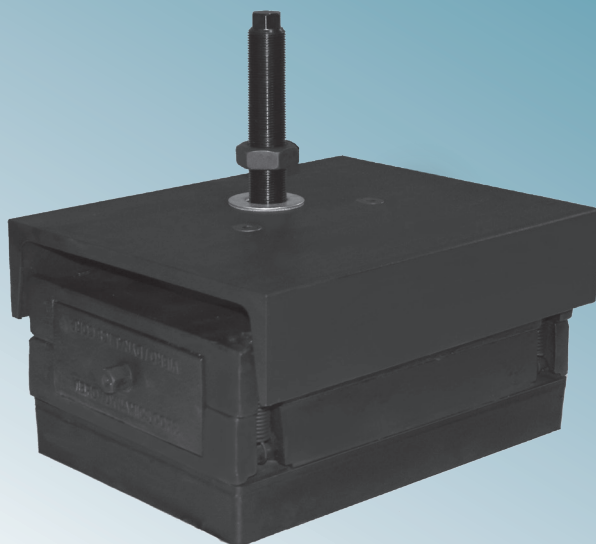
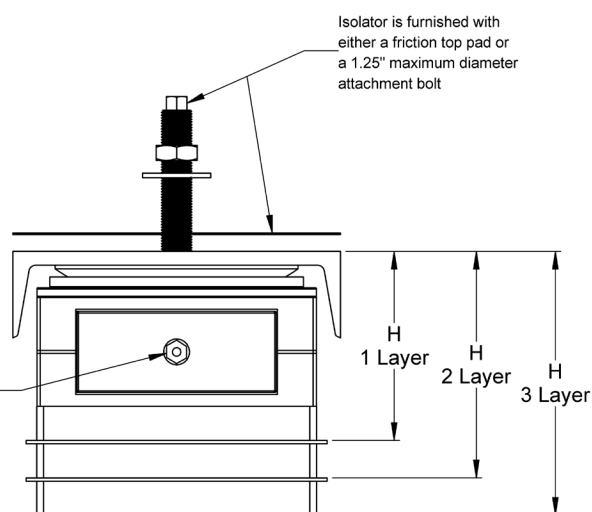


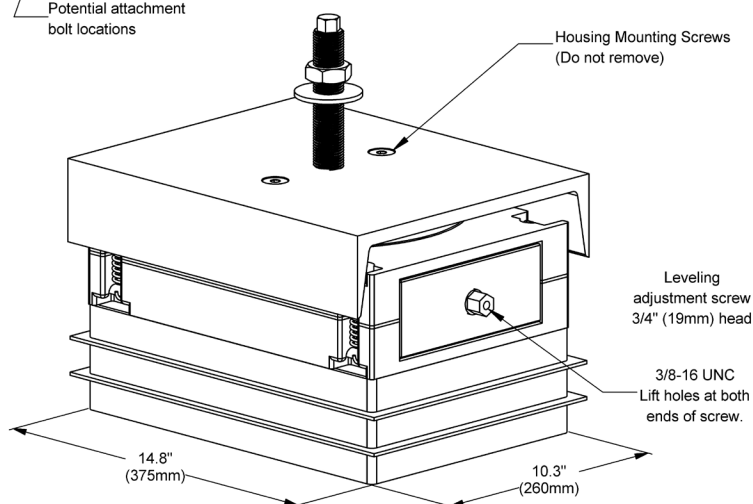

- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Swivel dish feature compensates for sloped floors, evenly loading isolator
- Patented Glide-Ring® feature dissipates horizontal forces to prevent walking
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

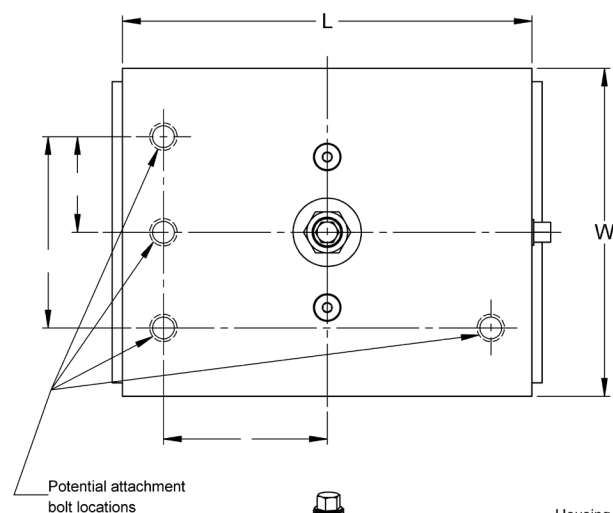

| Isolator                                            |         |          | L  |     | W  |     | H ±1/8" (3mm) |     |         |     |           |     | Weight |     |
|-----------------------------------------------------|---------|----------|----|-----|----|-----|---------------|-----|---------|-----|-----------|-----|--------|-----|
|                                                     |         |          |    |     |    |     | Minimum       |     | Maximum |     | Installed |     |        |     |
| Series                                              |         | Model    |    |     |    |     | inch          | mm  | inch    | mm  | inch      | mm  | inch   | mm  |
| 16WH                                                | 1 Layer | 16WHM47  | 15 | 381 | 12 | 305 | 7.4           | 188 | 8.4     | 231 | 7.9       | 201 | 198    | 90  |
|                                                     |         | 16WHL62  | 15 | 381 | 12 | 305 | 7.0           | 178 | 8.0     | 203 | 7.5       | 191 | 195    | 88  |
|                                                     |         | 16WHK72  | 15 | 381 | 12 | 305 | 6.8           | 173 | 7.8     | 198 | 7.3       | 185 | 194    | 88  |
|                                                     |         | 16WHX80  | 15 | 381 | 12 | 305 | 6.5           | 165 | 7.5     | 191 | 7.0       | 178 | 191    | 87  |
| 16WH                                                | 2 Layer | 16WHM472 | 15 | 381 | 12 | 305 | 9.3           | 236 | 10.3    | 262 | 9.8       | 249 | 224    | 102 |
|                                                     |         | 16WHL622 | 15 | 381 | 12 | 305 | 8.9           | 226 | 9.9     | 251 | 9.4       | 239 | 219    | 99  |
|                                                     |         | 16WHK722 | 15 | 381 | 12 | 305 | 8.7           | 221 | 9.7     | 246 | 9.2       | 234 | 216    | 98  |
|                                                     |         | 16WHX802 | 15 | 381 | 12 | 305 | 8.4           | 231 | 9.4     | 239 | 8.9       | 226 | 210    | 95  |
| 16WH                                                | 3 Layer | 16WHM473 | 15 | 381 | 12 | 305 | 11.2          | 284 | 12.2    | 310 | 11.7      | 297 | 250    | 113 |
|                                                     |         | 16WHL623 | 15 | 381 | 12 | 305 | 10.8          | 274 | 11.8    | 300 | 11.3      | 287 | 245    | 111 |
|                                                     |         | 16WHK723 | 15 | 381 | 12 | 305 | 10.6          | 269 | 11.6    | 295 | 11.1      | 282 | 242    | 110 |
|                                                     |         | 16WHX803 | 15 | 381 | 12 | 305 | 10.3          | 262 | 11.3    | 287 | 10.8      | 274 | 236    | 107 |
| * Use of Friction Pad adds 0.1" to Isolator Height. |         |          |    |     |    |     |               |     |         |     |           |     |        |     |

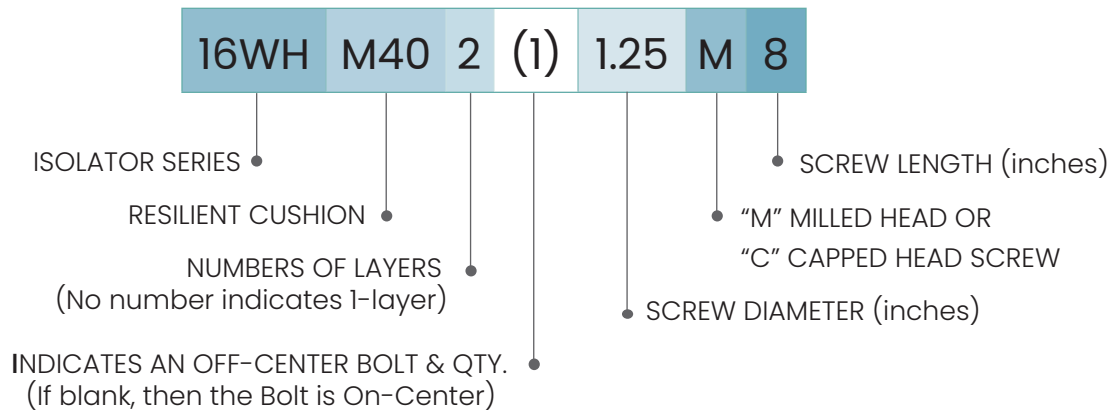

## TYPICAL APPLICATIONS

- Die Casting Machines
- Cold Headers
- Lathes
- Generators
- Injection Molding Machines
- Presses, Mechanical
- Drills & Boring Machines
- Saws
- Machining Centers
- Presses, Hydraulic
- Transfer Lines
- Metal Container Machinery
- Drilling & Milling Machines
- Grinding Machines
- Swagers
- Pumps & Compressors

**NOTE: Isolator data subject to change without notice.**

**10/05/2023**



Socitec US LLC  
2243 Braga, Drive, Broadview, IL 60155  
tel.: 800.842.7668 • vibro@vibro-dynamics.com  
www.vibro-dynamics.com