


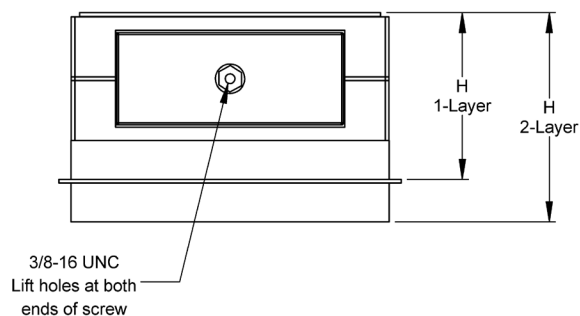


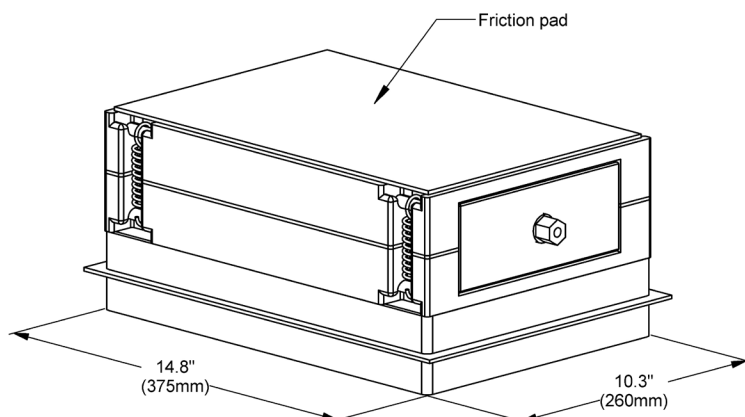

- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

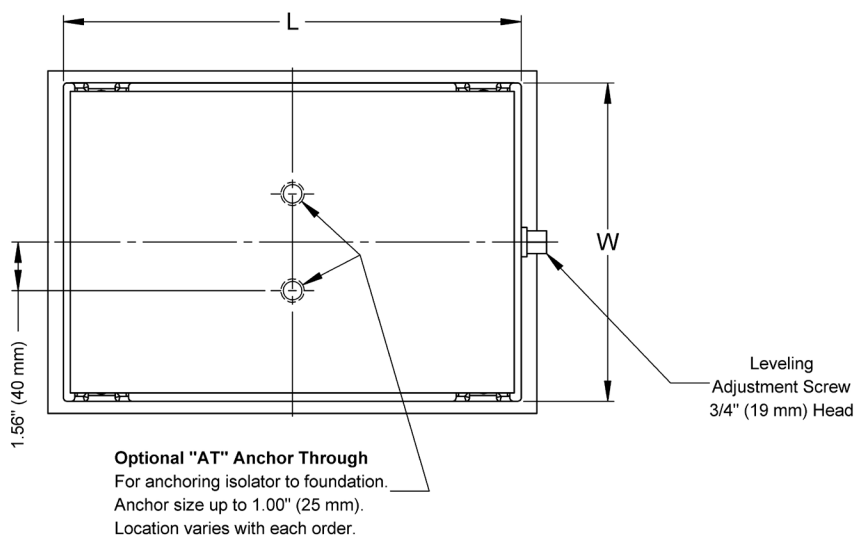

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
16WN	1 Layer	16WNM47	14.8	376	10.2	259	5.9	150	6.9	175	6.4	163	151	69
		16WNL62	14.8	376	10.2	259	5.5	140	6.5	165	6.0	152	149	68
		16WNLK72	14.8	376	10.2	259	5.3	135	6.3	160	5.8	147	147	67
		16WNX80	14.8	376	10.2	259	5.0	127	6.0	152	5.5	140	144	65
16WN	2 Layer	16WNM472	14.8	376	10.2	259	7.8	198	8.8	224	8.3	211	177	80
		16WNL622	14.8	376	10.2	259	7.0	178	8.0	203	7.5	191	175	79
		16WNLK722	14.8	376	10.2	259	6.6	168	7.6	193	7.1	180	173	78
		16WNX802	14.8	376	10.2	259	6.0	152	7.0	178	6.5	165	170	77
* Use of Friction Pad adds 0.1" to Isolator Height.														

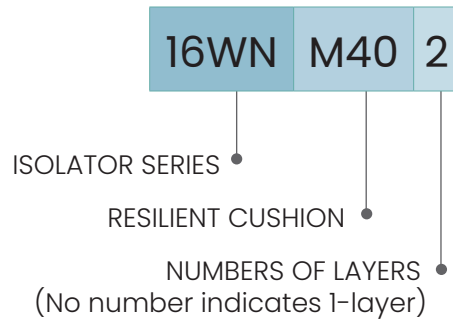

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

10/05/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibrodynamics.com
www.vibro-dynamics.com