


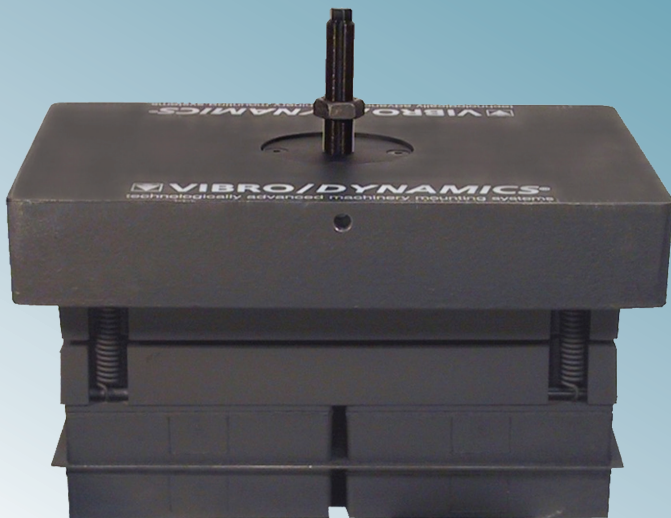
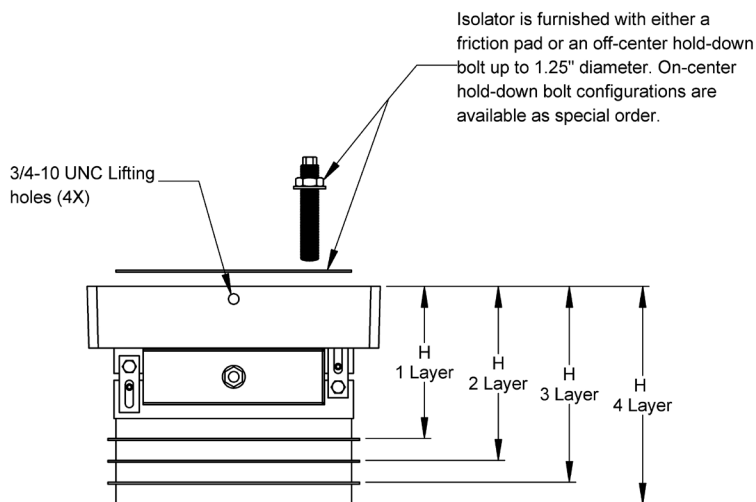


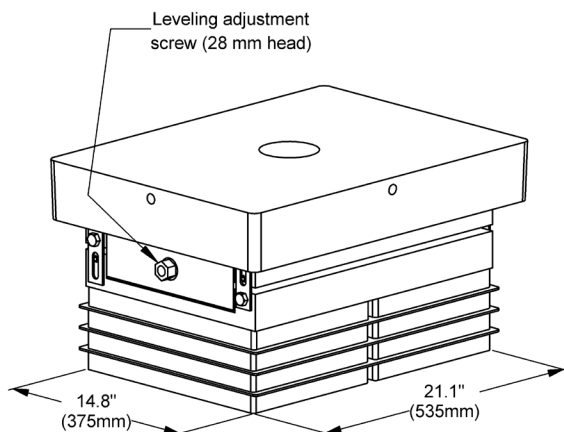

- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Swivel dish feature compensates for sloped floors, evenly loading isolator
- Patented Glide-Ring® feature dissipates horizontal forces to prevent walking
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

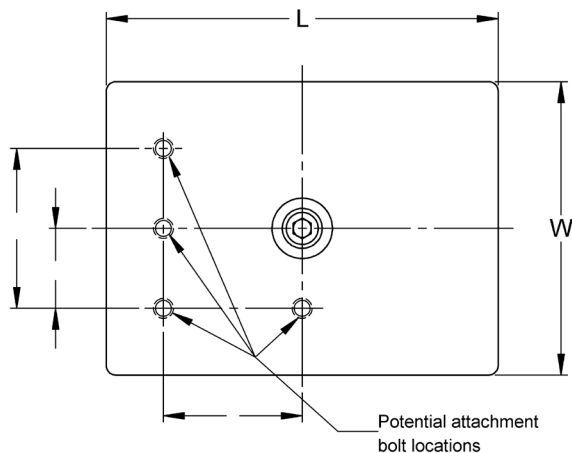

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
24WH	1 Layer	24WHM080	24.6	625	18.4	467	10.0	254	11.1	282	10.6	269	660	299
		24WHM095	24.6	625	18.4	467	10.1	257	11.2	284	10.7	272	637	289
		24WHL124	24.6	625	18.4	467	9.7	246	10.8	274	10.3	262	631	286
		24WHK144	24.6	625	18.4	467	9.5	241	10.6	269	10.1	257	628	285
		24WHX160	24.6	625	18.4	467	9.2	234	10.3	262	9.8	249	622	282
24WH	2 Layer	24WHM0802	24.6	625	18.4	467	11.9	302	13.0	330	12.5	318	720	327
		24WHM0952	24.6	625	18.4	467	12.0	305	13.1	333	12.6	320	659	299
		24WHL1242	24.6	625	18.4	467	11.3	287	12.4	315	11.9	302	654	297
		24WHK1442	24.6	625	18.4	467	10.8	274	11.9	302	11.4	290	650	295
		24WHX1602	24.6	625	18.4	467	10.2	259	11.3	287	10.8	274	644	292
24WH	3 Layer	24WHM0803	24.6	625	18.4	467	13.8	351	14.9	378	14.4	366	780	354
		24WHM0953	24.6	625	18.4	467	13.9	353	15.0	381	14.5	368	681	309
		24WHL1243	24.6	625	18.4	467	12.8	325	13.9	353	13.4	340	676	307
		24WHK1443	24.6	625	18.4	467	12.2	310	13.3	338	12.8	325	672	305
		24WHX1603	24.6	625	18.4	467	11.1	282	12.2	310	11.7	297	654	297
24WH	4 Layer	24WHM0804	24.6	625	18.4	467	15.6	396	16.7	424	16.2	411	840	381
		24WHM0954	24.6	625	18.4	467	15.7	399	16.8	427	16.3	414	703	319
		24WHL1244	24.6	625	18.4	467	14.4	366	15.5	394	15.0	381	699	317
		24WHK1444	24.6	625	18.4	467	13.5	343	14.6	371	14.1	366	694	315
		24WHX1604	24.6	625	18.4	467	12.2	310	13.2	335	12.7	323	664	301
* Use of Friction Pad adds 0.1" to Isolator Height.														

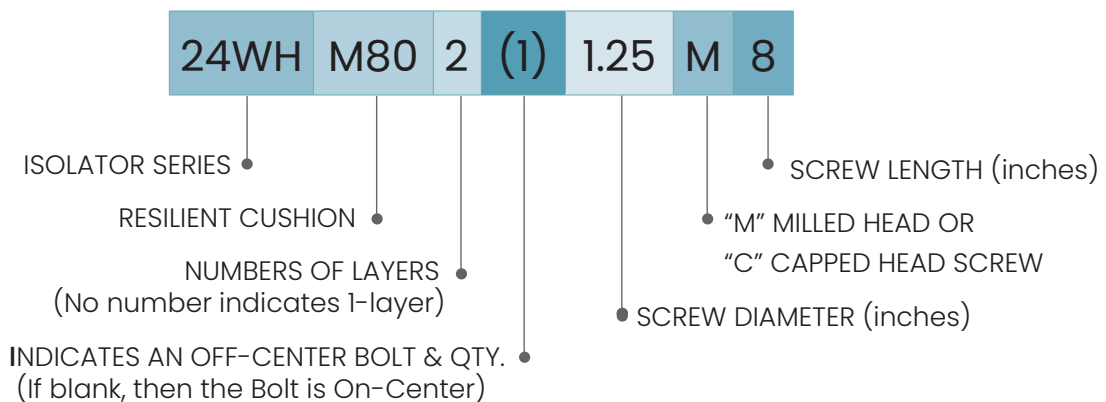

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

10/05/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibrodynamics.com
www.vibro-dynamics.com