

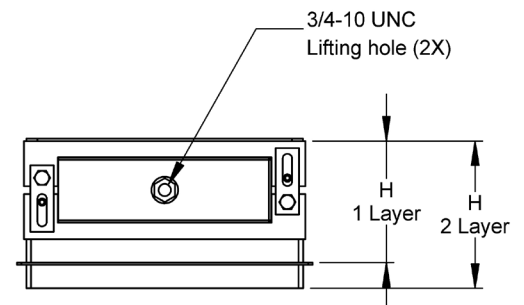


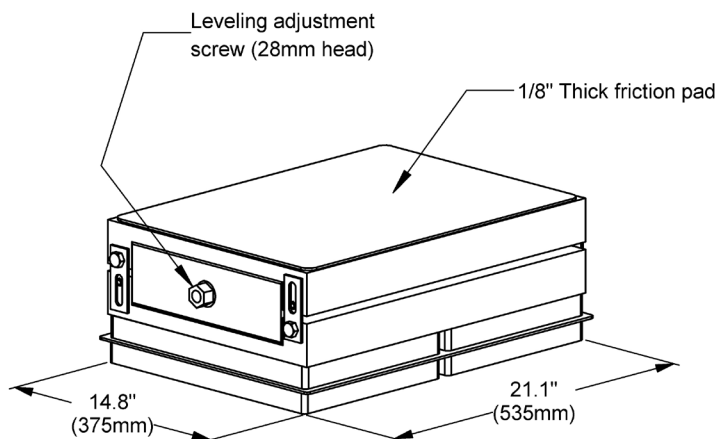


- Custom engineered elastomeric isolator
- Wedge leveling mechanism quickly levels and aligns machines
- Proprietary nitrile elastomer resilient cushions with excellent oil and chemical resistance
- Multiple elastomer models for better isolation effectiveness
- Protect equipment and surroundings from vibration
- Optional bolt(s) to secure isolator to foot
- Meets OSHA anchoring requirements

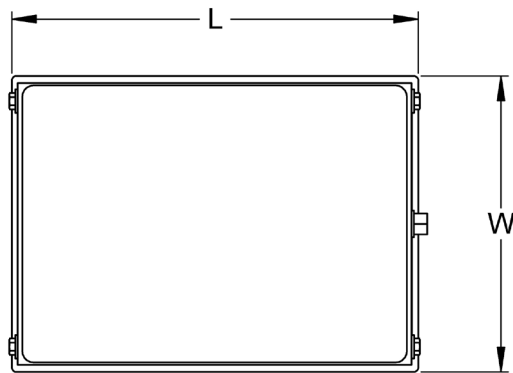

Isolator			L		W		H ±1/8" (3mm)						Weight	
Series		Model					Minimum		Maximum		Installed			
			inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	Kg
24WN	1 Layer	24WNM095	21.8	554	14.8	376	6.8	173	7.9	201	7.4	188	366	166
		24WNL124	21.8	554	14.8	376	6.4	163	7.5	191	7.0	178	361	164
		24WNL144	21.8	554	14.8	376	6.2	157	7.3	185	6.8	173	358	162
		24WNX160	21.8	554	14.8	376	5.9	150	7.0	178	6.5	165	352	160
24WN	2 Layer	24WNM0952	21.8	554	14.8	376	8.6	218	9.6	244	9.1	231	398	181
		24WNL1242	21.8	554	14.8	376	8.0	203	9.0	229	8.5	216	387	176
		24WNL1442	21.8	554	14.8	376	7.5	191	8.5	216	8.0	203	383	174
		24WNX1602	21.8	554	14.8	376	6.8	173	7.8	198	7.3	185	375	170

* Use of Friction Pad adds 0.1" to Isolator Height.

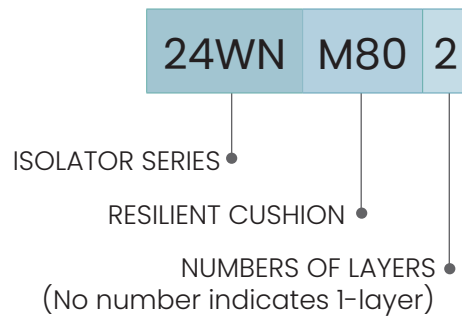

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

10/05/2023



Socitec US LLC
2243 Braga. Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibrodynamics.com
www.vibro-dynamics.com