






- Excellent isolation for effective control of vibration and shock.
- High-performance, multi-layer, modular elastomer construction.
- Shim leveling using metal shims supplied by Vibro/Dynamics.
- Large anchor bolts not required to keep machine from walking.
- Grout or sole plates are recommended, but usually not required due to wide foundation tilt and slope tolerance.


CUSTOM DESIGNS & SIZES ARE AVAILABLE

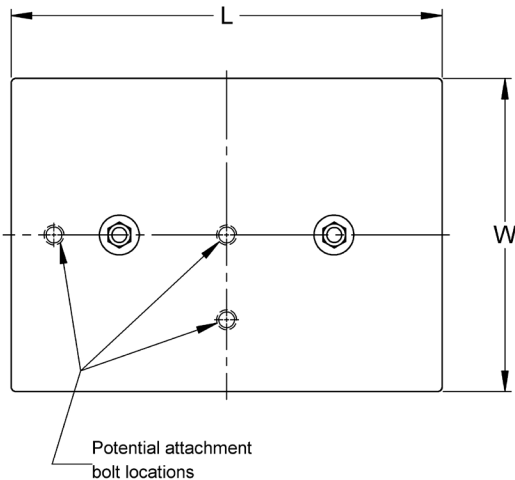

Optional attachment bolt
For anchoring machine foot to Isolator.
Location varies with each order.

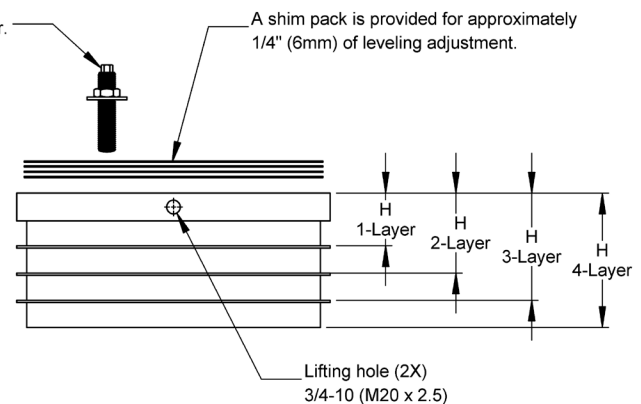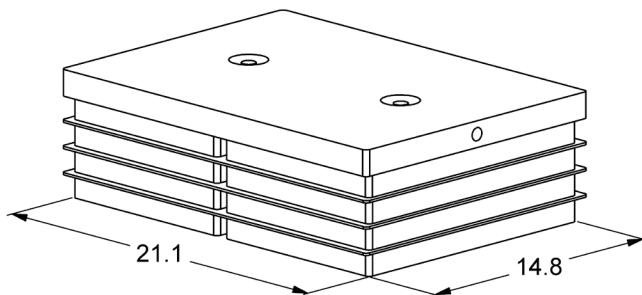

Isolator			L		W		H ±1/8" (3mm)		Foundation Tolerances				Weight	
							Min. Installed Ht.		Flatness ±		Slope in/ft			
Series		Model	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs.	Kg
24MXBN	1 Layer	24MXBN0801	21.7	551	15.8	401	3.2	81	0.07	1.8	0.04	1.0	194	88
		24MXBN0951	21.7	551	15.8	401	3.2	81	0.07	1.8	0.04	1.0	194	88
		24MXBN1241	21.7	551	15.8	401	2.8	71	0.05	1.3	0.03	0.8	189	86
25MXBN		25MXBN1441	21.7	551	15.8	401	2.6	66	0.04	1.0	0.03	0.8	187	85
25MXBN1601		21.7	551	15.8	401	2.3	58	0.03	0.8	0.02	0.5	182	83	
24MXBN	2 Layer	24MXBN0802	21.7	551	15.8	401	5.1	130	0.07	1.8	0.09	2.3	246	112
		24MXBN0952	21.7	551	15.8	401	5.1	130	0.07	1.8	0.09	2.3	246	112
		24MXBN1242	21.7	551	15.8	401	4.4	112	0.05	1.3	0.07	1.8	236	107
25MXBN		25MXBN1442	21.7	551	15.8	401	3.9	99	0.04	1.0	0.03	0.8	232	105
25MXBN1602		21.7	551	15.8	401	3.2	81	0.03	0.8	0.03	0.8	222	101	
24MXBN	3 Layer	24MXBN0803	21.7	551	15.8	401	7.0	178	0.07	1.8	0.13	3.3	298	135
		24MXBN0953	21.7	551	15.8	401	7.0	178	0.07	1.8	0.13	3.3	298	135
		24MXBN1243	21.7	551	15.8	401	5.9	150	0.05	1.3	0.10	2.5	282	128
25MXBN		25MXBN1443	21.7	551	15.8	401	5.2	132	0.04	1.0	0.08	2.0	276	125
25MXBN1603		21.7	551	15.8	401	4.2	107	0.03	0.8	0.05	1.3	261	118	

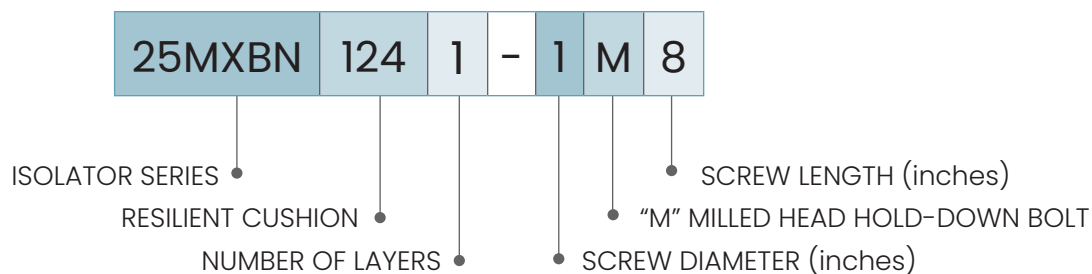

TYPICAL APPLICATIONS

- Presses, Mechanical
- Hydraulic Presses
- Forging Presses
- Isolated Foundations
- Transfer Presses
- Structures

NOTE: Isolator data subject to change without notice.

09/26/2023



Socitec US LLC
 2243 Braga, Drive, Broadview, IL 60155
 tel.: 800.842.7668 • vibro@vibro-dynamics.com
 www.vibro-dynamics.com