




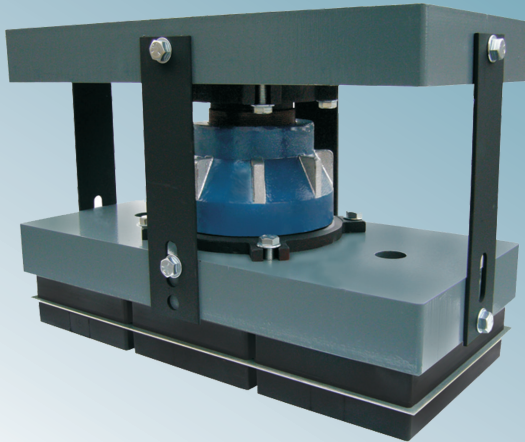


- Excellent isolation for effective control of vibration and shock
- High-performance, multi-layer, modular elastomer construction
- Hydra/Level® Assisted Leveling
 - faster, easier leveling, alignment and elevation adjustment
 - preventative maintenance insurance in the event of foundation settling.
- Integrated precision leveling
 - more precise
 - infinitely adjustable
- Two degree swiveling capability for:
 - uniform support
 - elimination of foundation, grout, or sole plates

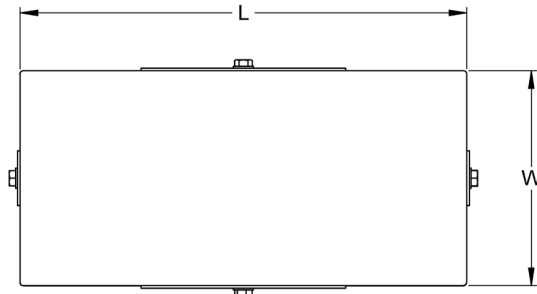


Hydraulic Cylinders used in MX Products are available from third party sources. See Specifications below.

Isolator Model	Cylinder Capacity		Number of Cylinders Required	Cylinder Dimensions				Cylinder Stroke	
	US Tons	MN		Diameter (max.)		Height (max.)			
				inch	mm	inch	mm	inch	mm
30MXLP	93	0.83	2	9.3	237	8.9	227	2.38	60
31MXLP	108	0.96	4	8.8	224	8.3	211	2.38	60

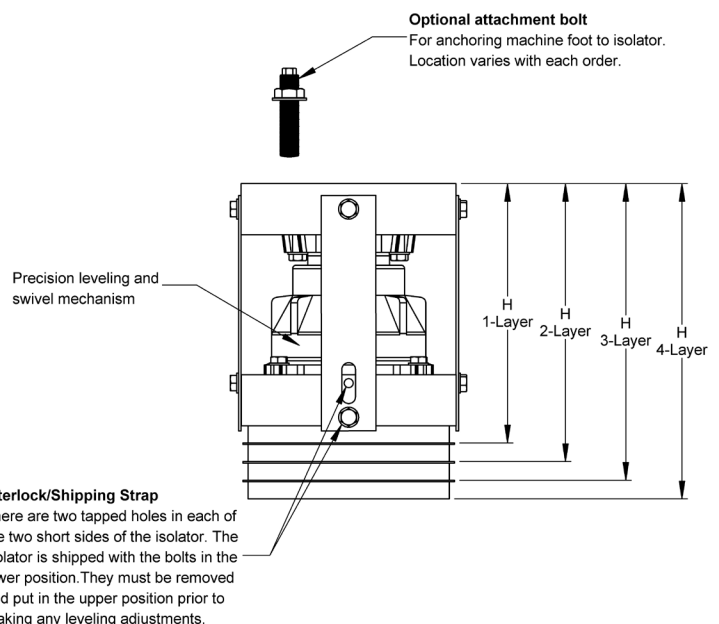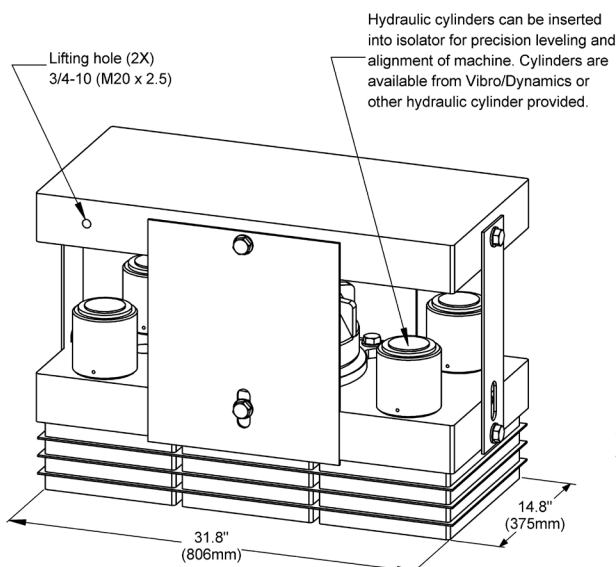

Isolator			L		W		H ±1/8" (3mm)						Weight	
							Min.		Max.		Installed			
Series		Model	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs.	Kg
30MXLP	1 Layer	30MXLP1201	32.8	833	15.8	401	18.6	472	20.6	523	19.6	498	1360	617
		30MXLP1431	32.8	833	15.8	401	18.6	472	20.6	523	19.6	498	1362	618
		30MXLP1861	32.8	833	15.8	401	18.2	462	20.2	513	19.2	488	1380	626
31MXLP	1 Layer	31MXLP2161	32.8	833	15.8	401	18.0	457	20.0	508	19.0	483	1375	624
		31MXLP2401	32.8	833	15.8	401	18.5	470	20.5	521	19.5	495	1349	612
30MXLP	2 Layer	30MXLP1202	32.8	833	15.8	401	20.4	518	22.4	569	21.4	544	1440	653
		30MXLP1432	32.8	833	15.8	401	20.4	518	22.4	569	21.4	544	1442	654
		30MXLP1862	32.8	833	15.8	401	19.8	503	21.8	554	20.8	528	1452	663
31MXLP	2 Layer	31MXLP2162	32.8	833	15.8	401	19.3	490	21.3	541	20.3	516	1443	655
		31MXLP2402	32.8	833	15.8	401	19.8	503	21.8	554	20.8	528	1429	648
30MXLP	3 Layer	30MXLP1203	32.8	833	15.8	401	22.3	566	24.3	617	23.3	592	1518	689
		30MXLP1433	32.8	833	15.8	401	22.3	566	24.3	617	23.3	592	1520	690
		30MXLP1863	32.8	833	15.8	401	21.3	541	23.3	592	22.3	566	1523	691
31MXLP	3 Layer	31MXLP2163	32.8	833	15.8	401	20.6	523	22.6	574	21.6	549	1509	685
30MXLP	4 Layer	30MXLP1204	32.8	833	15.8	401	24.2	615	26.2	665	25.2	640	1578	716
		30MXLP1434	32.8	833	15.8	401	24.2	615	26.2	665	25.2	640	1581	717
		30MXLP1864	32.8	833	15.8	401	22.9	582	24.9	632	23.9	607	1577	715
31MXLP	4 Layer	31MXLP2164	32.8	833	15.8	401	21.9	556	23.9	607	22.9	582	1559	707

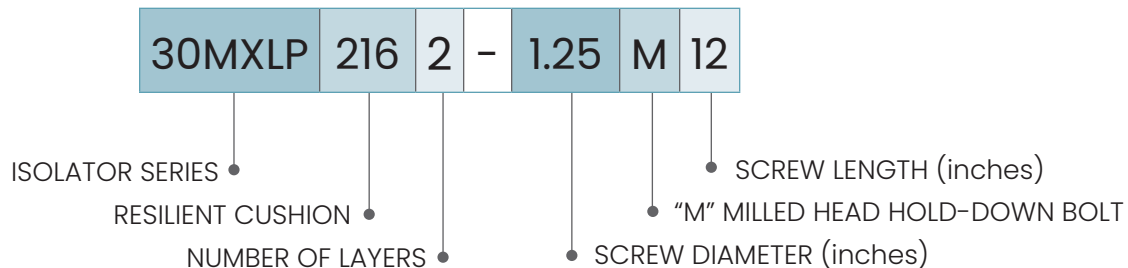

TYPICAL APPLICATIONS

- Presses, Mechanical
- Forging Presses
- Transfer Presses
- Hydraulic Presses
- Isolated Foundations
- Structures

NOTE: Isolator data subject to change without notice.

09/19/2023



Socitec US LLC
2243 Braga Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com