



- Excellent isolation for effective control of vibration and shock.
- High-performance, multi-layer, modular elastomer construction.
- Shim leveling using metal shims supplied by Vibro/Dynamics.
- Large anchor bolts not required to keep machine from walking.
- Grout or sole plates are recommended, but usually not required due to wide foundation tilt and slope tolerance.


CUSTOM DESIGNS & SIZES ARE AVAILABLE



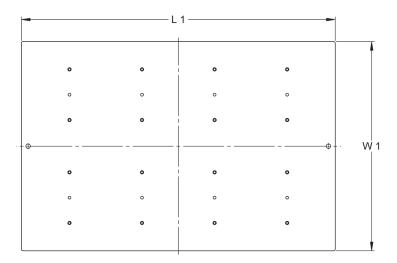

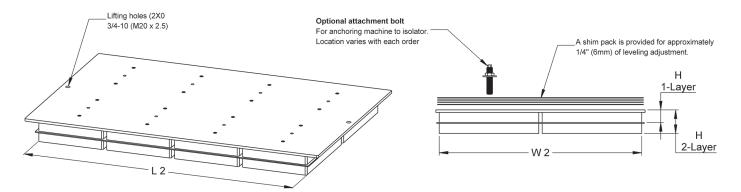

lsolator									14/		H ±1/8" (3mm)		Foundation Tolerances					
Series		Madal	L		W <sub>1</sub>		L <sub>2</sub>		W <sub>2</sub>		Min. Installed		Flatness ±		Slope in/ft		Weight	
		Model	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs.	Kg
44MXBL	1 Layer	44MXBL3801	46.5	1181	31.0	787	42.5	1080	30.0	762	2.2	56	0.07	1.8	0.02	0.5	515	234
		44MXBL4961	46.5	1181	31.0	787	42.5	1080	30.0	762	1.8	46	0.05	1.3	0.02	0.5	490	222
46MXBL		46MXBL5761	46.5	1181	31.0	787	42.5	1080	30.0	762	1.6	41	0.04	1.0	0.01	0.3	475	216
44MXBL	2 Layer	44MXBL3802	46.5	1181	31.0	787	42.5	1080	30.0	762	4.1	104	0.07	1.8	0.04	1.0	735	333
		44MXBL4962	46.5	1181	31.0	787	42.5	1080	30.0	762	3.3	84	0.05	1.3	0.03	0.8	685	311
46MXBL		46MXBL5762	46.5	1181	31.0	787	42.5	1080	30.0	762	2.9	74	0.04	1.0	0.03	0.8	665	302

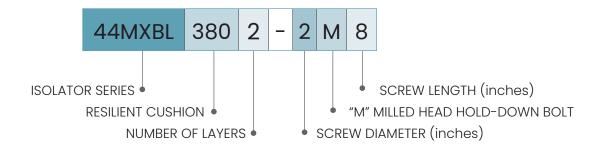



- Transfer Presses

- Structures

NOTE: Isolator data subject to change without notice.



## 09/21/2023

Socitec US LLC 2243 Braga. Drive, Broadview, IL 60155 tel.: 800.842.7668 · vibro@vibrodynamics.com www.vibro-dynamics.com