





- Ultimate control of vibration and shock transmission
- Viscous damping
- 4.0-7.0 Hz natural frequency
- Shim leveling
- Grout or sole plates are recommended


CUSTOM DESIGNS & SIZES ARE AVAILABLE

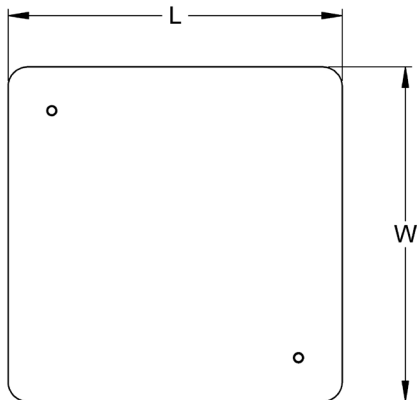

A shim pack is provided for approximately 1/4" (6mm) of leveling adjustment

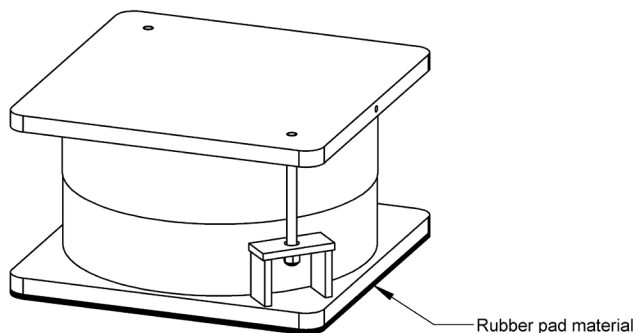


Optional attachment bolt
For anchoring machine foot to isolator.
Location varies with each order.

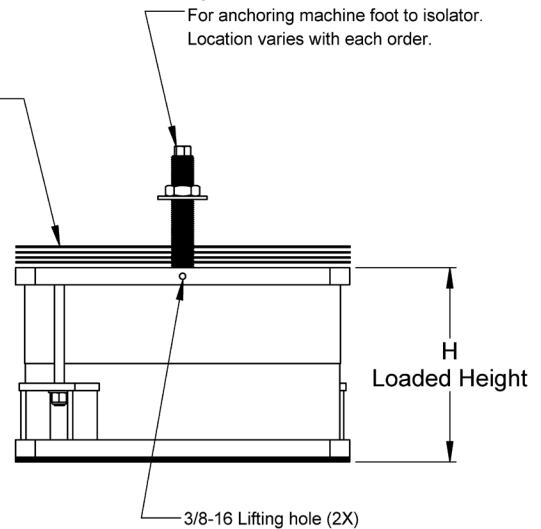

MODEL: SVXN16 SERIES

Model Number	L		W		H ± 0.2 (5mm)		Maximum Static Load		Foundation Flatness Tolerance $\pm$		Foundation Slope Tolerance in/ft		Weight	
	inch	mm	inch	mm	inch	mm	lbs	kN	inch	mm	inch	mm	lbs	Kg
SVXN1604-13-04	17.0	432	17.0	432	9.3-9.6	236-244	44,000	196	0.03	0.8	0.08	2.0	290	132
SVXN1607-13-06	19.0	483	19.0	483	9.3-9.6	236-244	66,000	294	0.03	0.8	0.07	1.8	385	175
SVXN1607-13-07	19.0	483	19.0	483	9.3-9.6	236-244	77,000	343	0.03	0.8	0.07	1.8	404	183
SVXN1609-13-08	21.0	533	21.0	533	9.3-9.6	236-244	88,000	391	0.03	0.8	0.06	1.5	469	213
SVXN1609-13-09	21.0	533	21.0	533	9.3-9.6	236-244	99,000	440	0.03	0.8	0.06	1.5	488	221

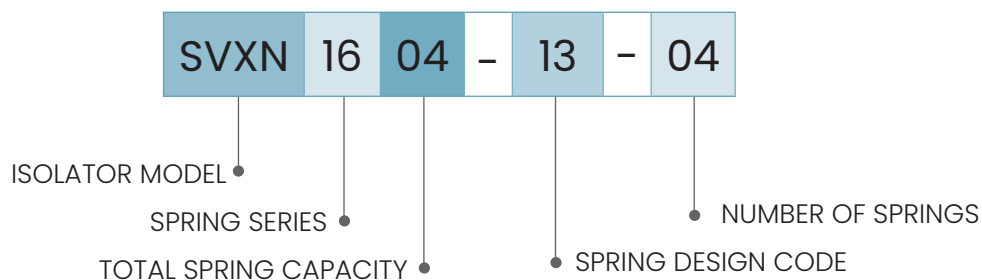

TYPICAL APPLICATIONS

- Stamping Presses
- Hydraulic Presses
- Forging Presses
- Mills
- Turbines
- Pumps, Blowers
- Building isolation
- Centrifuges

NOTE: Isolator data subject to change without notice.

10/20/2023



Socitec US LLC
 2243 Braga Drive, Broadview, IL 60155
 tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com