

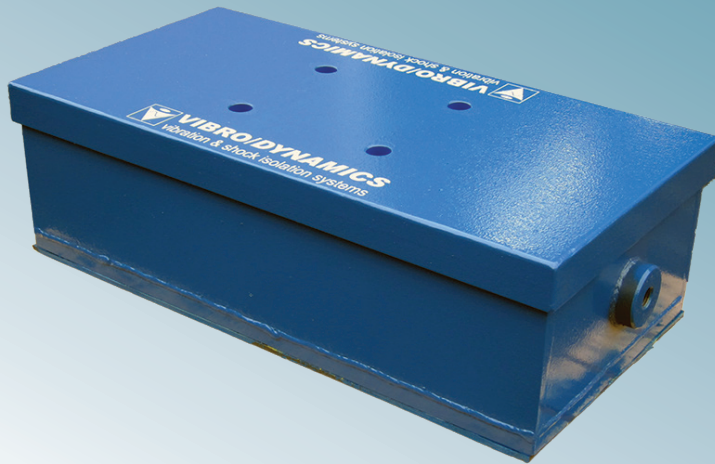


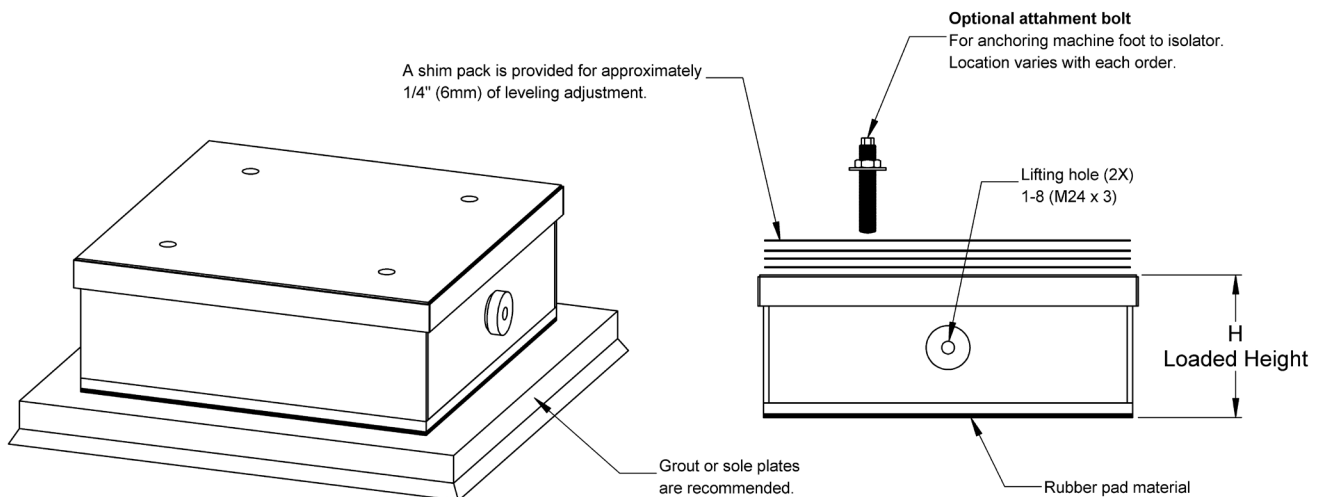


- Ultimate control of vibration and shock transmission
- Viscous damping
- 4.4-7.0 Hz natural frequency
- Shim leveling
- Grout or sole plates are recommended.

CUSTOM DESIGNS & SIZES ARE AVAILABLE

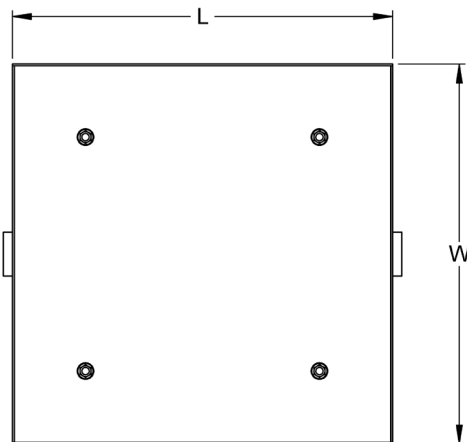

MODEL: SVXN61 SERIES

Isolator Model	L		W		H ±0.2 (5mm)		Maximum Static Load		Foundation Flatness Tolerance ±		Foundation Slope Tolerance in/ft		Estimated Weight	
	inch	mm	inch	mm	inch	mm	lbs	kN	inch	mm	inch	mm	lbs	Kg
SVXN6106-15-0600	26.3	668	18.3	465	9.3-9.5	236-241	149,000	660	0.03	0.8	0.04	1.0	925	420
SVXN6106-15-0606	26.3	668	18.3	465	9.3-9.5	236-241	169,000	750	0.03	0.8	0.04	1.0	1000	450
SVXN6108-15-0800	34.3	871	18.3	465	9.3-9.5	236-241	199,000	890	0.03	0.8	0.04	1.0	1230	560
SVXN6109-15-0800	26.0	660	26.0	660	9.3-9.5	236-241	199,000	890	0.03	0.8	0.04	1.0	1280	580
SVXN6108-15-0808	34.3	871	18.3	465	9.3-9.5	236-241	225,000	1000	0.03	0.8	0.04	1.0	1300	590
SVXN6109-15-0900	26.0	660	26.0	660	9.3-9.5	236-241	225,000	1000	0.03	0.8	0.04	1.0	1320	600
SVXN6109-15-0909	26.0	660	26.0	660	9.3-9.5	236-241	253,000	1130	0.03	0.8	0.04	1.0	1430	650
SVXN6112-15-1200	34.0	864	26.0	660	9.3-9.5	236-241	298,000	1330	0.03	0.8	0.04	1.0	1550	705
SVXN6112-15-1206	34.0	864	26.0	660	9.3-9.5	236-241	318,000	1420	0.03	0.8	0.04	1.0	1620	735
SVXN6112-15-1212	34.0	864	26.0	660	9.3-9.5	236-241	338,000	1500	0.03	0.8	0.04	1.0	1690	770
SVXN6116-15-1600	34.3	871	34.3	871	9.3-9.5	236-241	398,000	1770	0.03	0.8	0.04	1.0	2060	935
SVXN6116-15-1608	34.3	871	34.3	871	9.3-9.5	236-241	424,000	1890	0.03	0.8	0.04	1.0	2155	978
SVXN6116-15-1616	34.3	871	34.3	871	9.3-9.5	236-241	450,000	2000	0.03	0.8	0.04	1.0	2250	1021
SVXN6118-15-1809	50.3	1278	26.3	668	10.8-11.0	274-279	477,000	2150	0.03	0.8	0.03	0.8	2425	1100
SVXN6118-15-1818	50.3	1278	26.3	668	10.8-11.0	274-279	507,000	2250	0.03	0.8	0.03	0.8	2535	1150
SVXN6120-15-2010	42.3	1074	34.3	871	10.8-11.0	274-279	530,000	2360	0.03	0.8	0.03	0.8	2712	1230
SVXN6120-15-2020	42.3	1074	34.3	871	10.8-11.0	274-279	563,000	2500	0.03	0.8	0.03	0.8	2844	1290
SVXN6124-15-2400	50.3	1278	34.3	871	10.8-11.0	274-279	596,000	2650	0.03	0.8	0.02	0.5	3109	1410
SVXN6124-15-2412	50.3	1278	34.3	871	10.8-11.0	274-279	636,000	2830	0.03	0.8	0.02	0.5	3241	1470
SVXN6124-15-2424	50.3	1278	34.3	871	10.8-11.0	274-279	676,000	3000	0.03	0.8	0.02	0.5	3395	1540

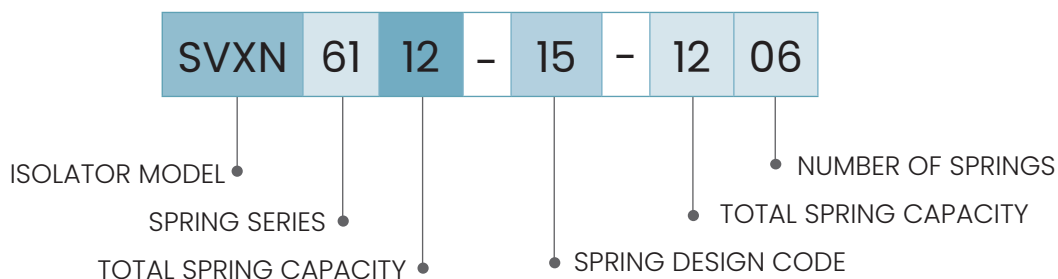

TYPICAL APPLICATIONS

- Stamping Presses
- Hydraulic Presses
- Forging Presses
- Mills
- Turbines
- Pumps, Blowers
- Building isolation
- Centrifuges

NOTE: Isolator data subject to change without notice.

10/23/2023



Socitec US LLC
2243 Braga, Drive, Broadview, IL 60155
tel.: 800.842.7668 • vibro@vibro-dynamics.com
www.vibro-dynamics.com