




- 2.5-7.0 Hz natural frequency range
- Material damping
- Load Ranges up to 6,960 lbs. (31 kN)
- Effectively isolates inertial and impact forces up to 99%
- Heavy-duty, low stress design
- Shim leveling design.



CUSTOM DESIGNS & SIZES ARE AVAILABLE

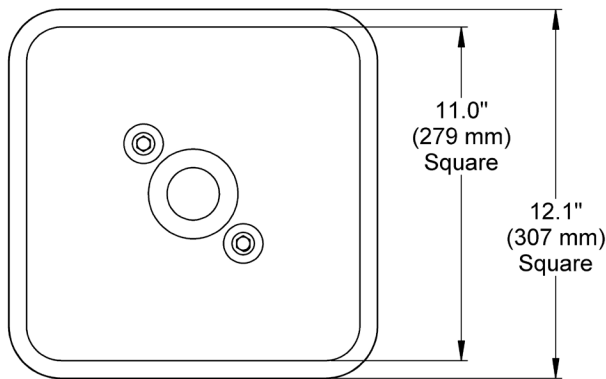


Optional attachment bolt

For anchoring machine foot to isolator.
Location varies with each order

A shim pack is provided for approximately
1/4" (6mm) of leveling adjustment

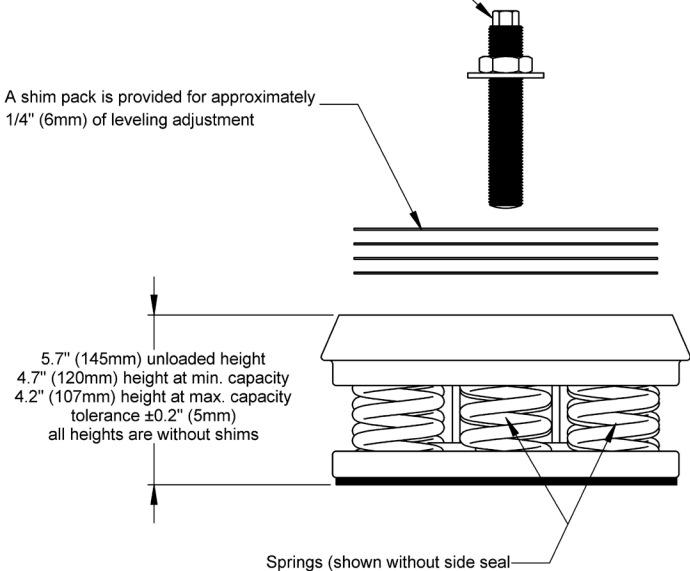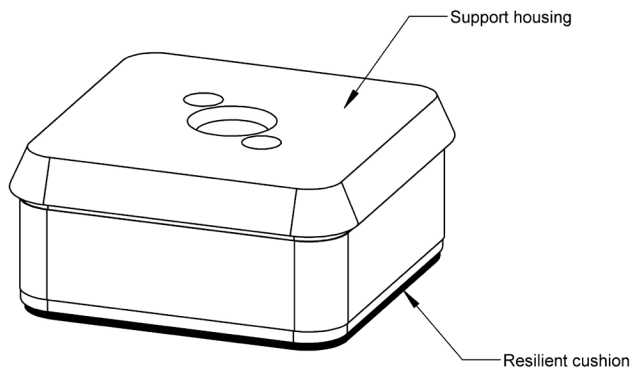

VSM1108 Isolator Specifications				
Model Number	Maximum Static Load		Isolator Weight	
	lbs.	kN	lbs.	Kg.
VSM1108-80	6,960	31	49	22
VSM1108-62	5,650	25	47	21
VSM1108-60	5,220	23	45	20
VSM1108-44	4,330	19	45	20
VSM1108-42	3,900	17	43	20
VSM1108-40	3,480	15	42	19
VSM1108-26	3,020	13	42	19
VSM1108-24	2,590	12	41	19
VSM1108-22	2,170	10	39	18
VSM1108-08	1,700	8	40	18
VSM1108-06	1,280	6	39	18
VSM1108-04	850	4	37	17

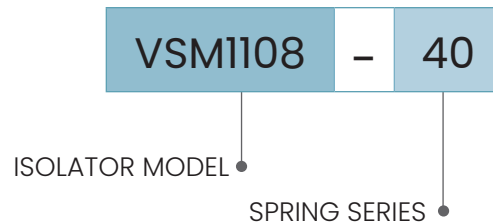

TYPICAL APPLICATIONS

- High-Speed Punch Presses
- Turret Punch Presses
- Gear Hobbers & Shapers
- EDM Machines
- CMM Machines
- Furnaces
- Precision Hones
- Test Stands

NOTE: Isolator data subject to change without notice.



10/13/2023

Socitec US LLC
 2243 Braga, Drive, Broadview, IL 60155
 tel.: 800.842.7668 • vibro@vibrodynamics.com
www.vibro-dynamics.com