




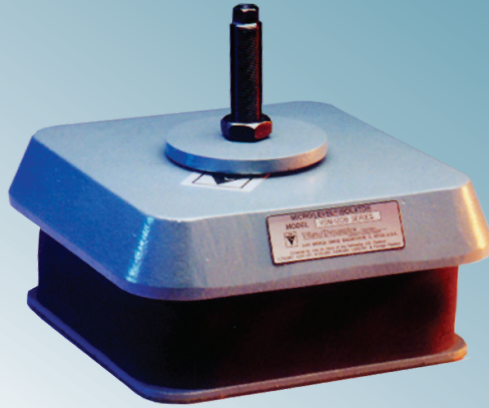


- 2.5-7.0 Hz natural frequency range
- Integral Leveling
- Material damping
- Load Ranges up to 6,960 lbs. (31 kN)
- Effectively isolates inertial and impact forces up to 99%
- Heavy-duty, low stress design.

CUSTOM DESIGNS & SIZES ARE AVAILABLE

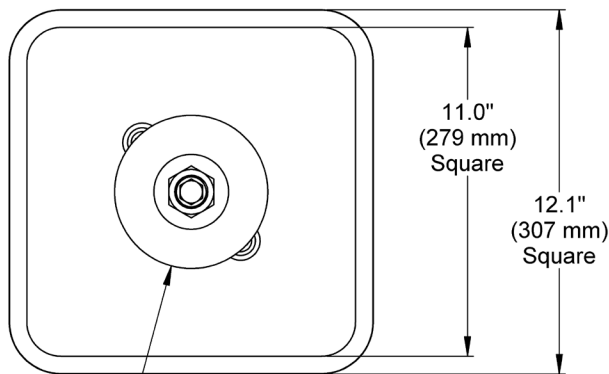


Ø 5.1" (130 mm)

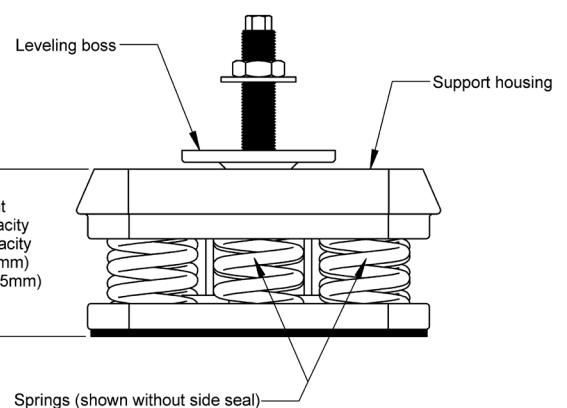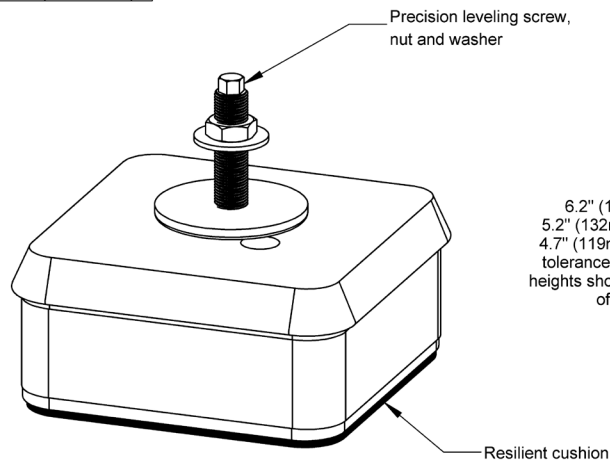

VSML1208 Isolator Specifications				
Model Number	Maximum Static Load		Isolator Weight	
	lbs.	kN	lbs.	Kg.
VSML1208-80	6,960	31	53	24
VSML1208-62	5,650	25	51	23
VSML1208-60	5,220	23	49	22
VSML1208-44	4,330	19	49	22
VSML1208-42	3,900	17	47	21
VSML1208-40	3,480	15	46	21
VSML1208-26	3,020	13	46	21
VSML1208-24	2,590	12	45	20
VSML1208-22	2,170	10	43	20
VSML1208-08	1,700	8	44	20
VSML1208-06	1,280	6	43	20
VSML1208-04	850	4	41	19

Leveling Screw	Foot Thickness Up To:		Weight	
	inch	mm	lbs	Kg
.625M4	0.43	10.9	0.4	0.18
.625M5	1.43	36.3	0.4	0.18
.625M6	2.43	61.7	0.5	0.23
.625M8	4.43	112.5	0.7	0.32
.625M10	6.43	163.3	1.0	0.45
.75M4	0.51	13.0	0.5	0.23
.75M6	2.51	63.8	0.7	0.32
.75M8	4.51	114.6	1.0	0.45
.75M10	6.51	165.4	1.4	0.64
1M4	0.38	9.7	1.2	0.54
1M5	1.38	35.1	1.3	0.59
1M6	2.38	60.5	1.5	0.68
1M8	4.38	111.3	1.9	0.86
1M10	6.38	162.1	2.3	1.04

Other Stock & Custom Lengths Available

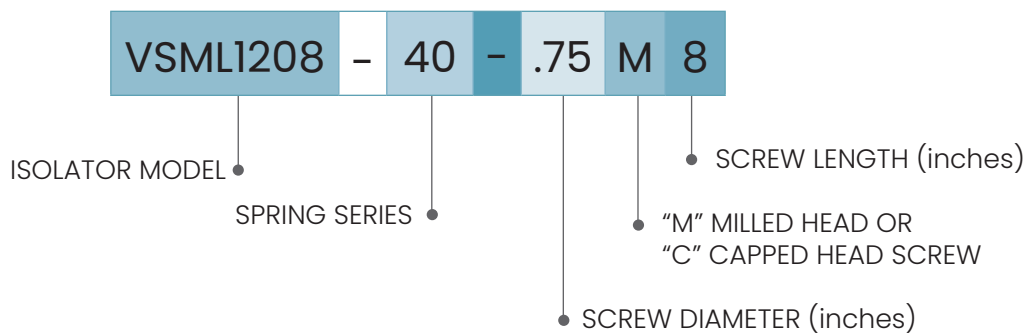

TYPICAL APPLICATIONS

- High-Speed Punch Presses
- Turret Punch Presses
- Gear Hobbers & Shapers
- EDM Machines
- CMM Machines
- Furnaces
- Precision Hones
- Test Stands

NOTE: Isolator data subject to change without notice.

10/13/2023



Socitec US LLC
 2243 Braga, Drive, Broadview, IL 60155
 tel.: 800.842.7668 • vibro@vibro-dynamics.com
 www.vibro-dynamics.com