






- Excellent isolation for effective control of vibration and shock.
- High-performance, multi-layer, modular elastomer construction.
- Shim leveling using metal shims supplied by Vibro/Dynamics.
- Large anchor bolts not required to keep machine from walking.
- Grout or sole plates are recommended, but usually not required due to wide foundation tilt and slope tolerance.


CUSTOM DESIGNS & SIZES ARE AVAILABLE

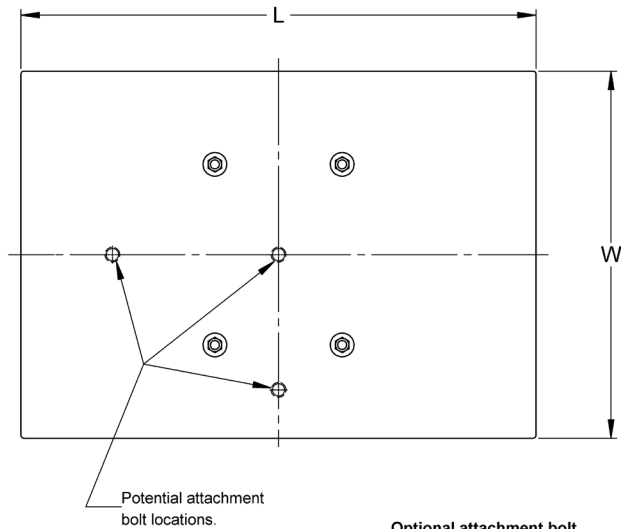

Optional attachment bolt
For anchoring machine foot to isolator.
Location varies with each order.

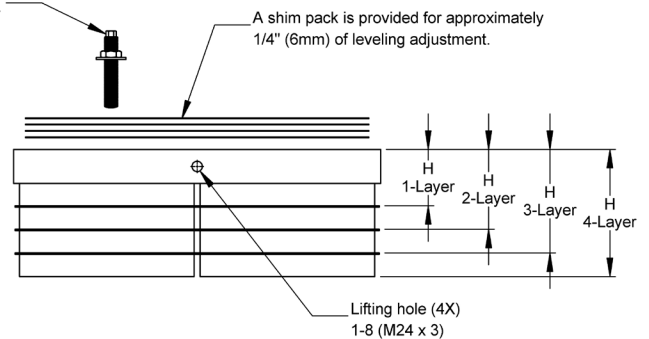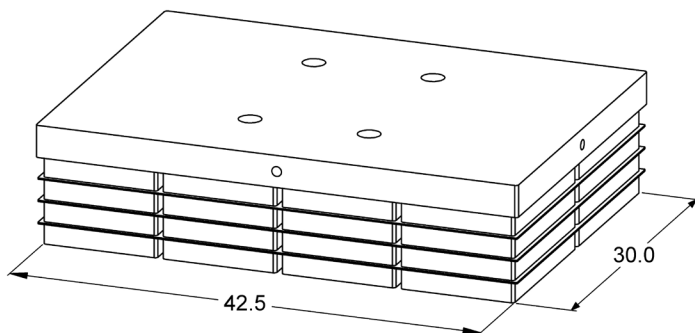

Isolator			L		W		H ±1/8" (3mm)		Foundation Tolerances				Weight	
							Min. Installed Ht.		Flatness ±		Slope in/ft			
Series		Model							inch	mm	inch	mm	inch	mm
44MXBN	1 layer	44MXBN3801	43.5	1105	31.0	787	4.7	119	0.07	1.8	0.02	0.5	1316	597
		44MXBN4961	43.5	1105	31.0	787	4.3	109	0.05	1.3	0.02	0.5	1316	597
46MXBN		46MXBN5761	43.5	1105	31.0	787	4.1	104	0.04	1.0	0.01	0.3	1296	588
44MXBN	2 Layer	44MXBN3802	43.5	1105	31.0	787	6.6	168	0.07	1.8	0.04	1.0	1528	693
		44MXBN4962	43.5	1105	31.0	787	5.9	150	0.05	1.3	0.03	0.8	1528	693
46MXBN		46MXBN5762	43.5	1105	31.0	787	5.4	137	0.04	1.0	0.03	0.8	1487	675
44MXBN	3 Layer	44MXBN3803	43.5	1105	31.0	787	8.5	216	0.07	1.8	0.06	1.5	1738	789
		44MXBN4963	43.5	1105	31.0	787	7.4	188	0.05	1.3	0.05	1.3	1739	789
46MXBN		46MXBN5763	43.5	1105	31.0	787	6.7	170	0.04	1.0	0.04	1.0	1678	761
44MXBN	4 Layer	44MXBN3804	43.5	1105	31.0	787	10.4	264	0.07	1.8	0.08	2.0	1950	885
		44MXBN4964	43.5	1105	31.0	787	9.0	229	0.05	1.3	0.07	1.8	1950	885
46MXBN		46MXBN5764	43.5	1105	31.0	787	8.0	203	0.04	1.0	0.05	1.3	1868	848

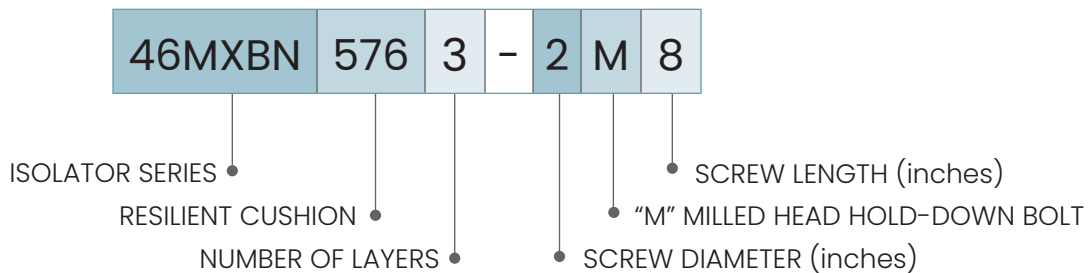

TYPICAL APPLICATIONS

- Presses, Mechanical
- Hydraulic Presses
- Forging Presses
- Isolated Foundations
- Transfer Presses
- Structures

NOTE: Isolator data subject to change without notice.

09/26/2023



Socitec US LLC
 2243 Braga Drive, Broadview, IL 60155
 tel.: 800.842.7668 • vibro@vibro-dynamics.com
 www.vibro-dynamics.com